



Autopole System

The ultimate adjustable lighting pole system can be used to create a background support, suspend lighting, structure a lighting grid, or for hundreds of other studio and location applications.

Its unique single action cantilever locking system exerts the correct amount of pressure to assure a secure fit, wedging the protective rubber ends in place wall to wall or ceiling to floor. The cantilever system incorporates a safety lock to prevent accidental de-tensioning or movement.



Autopole System

The Autopole® - The original adjustable lighting pole system.

- Unique cantilever single action locking system exerts pressure to securely wedge the rubber suction cup ends in place.
- Cantilever system incorporates safety lock.
- Floor to ceiling, or wall to wall fixing for strong vertical or horizontal support of lighting.
- Three versions, up to 370cm metres plus optional extensions available.
- Two styles: Original Autopole® and Autopole2® with variable thrust.

L2.89332.0 / LS.032.SPL

AUTOPOLE® SPIRIT LEVEL

Spirit level for use on Autopole®, or on tubes of 25mm to 60mm diameter.



L2.88650.0 / LS.032.PC

AUTOPOLE® PROTECTION CAPS

Set of four protection caps for rubber feet with inner hole.

Ø: 16.5mm. Suitable for use with all Autopoles except Mini Autopole® and Mini Pole LS.170.



L2.76993.0 / LS.032

AUTOPOLE®

📦 2.2kg

Extends from 210cm to 370cm.
Pole Ø: 45mm and 40mm.

B

L2.88721.0 / LS.432-3,7B

AUTOPOLE2®

📦 2.6kg

Two position variable thrust.
Extends from 210cm to 370cm.
Pole Ø: 45mm and 40mm.

L2.76994.0 / LS.076

AUTOPOLE®

📦 1.83kg

Extends from 150cm to 270cm.
Pole Ø: 45mm and 40mm.

B

L2.88720.0 / LS.432-2,7B

AUTOPOLE2®

📦 2.23kg

Two position variable thrust.
Extends from 150cm to 270cm.
Pole Ø: 45mm and 40mm.

L2.76996.0 / LS.077

AUTOPOLE®

📦 1.5kg

Extends from 100cm to 170cm.
Pole Ø: 45mm and 40mm.


B

L2.88719.0 / LS.432-1,7B

AUTOPOLE2®

📦 1.9kg

Two position variable thrust.
Extends from 100cm to 170cm.
Pole Ø: 45mm and 40mm.

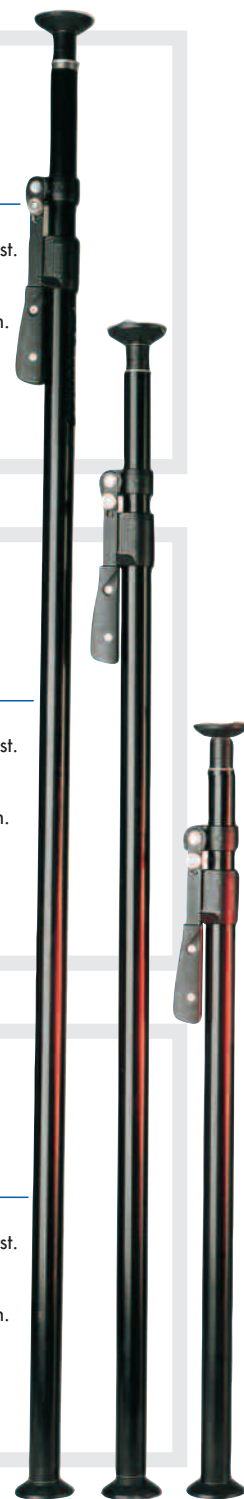


Autopole2® locking system with 2 setting for thrust tension.


**L2.89333.0 /
LS.032.BASE**

B

AUTOPOLE® BASE

 86cm

 126cm

 1.2kg

For tubes: Ø 45mm.
Legs Ø: 22mm.




**L2.89335.0 /
LS.170.BASE**

B


MINI POLE BASE

 62cm

 106cm

 0.67kg

For tubes Ø: 28mm.
Legs Ø: 22mm.



L2.88988.0 /LS.033

B

EXTENSION TUBE

 0.69kg


Autopole® Extension tube.
Ø: 40mm.
Length: 2m.
Suitable for Autopole2® and Autopole®.




**L2.89334.0 /
LS.170**

B

MINI POLE

 0.87kg


Spring loaded mini pole.
Extends from 175cm to 330cm.
Post Ø: 25mm and 28mm.



**L2.89336.0 /
LS.034**

B

EXTENSION TUBE

 0.53kg

Autopole® Extension tube.
Ø: 40mm.
Length: 1.5m.
Suitable for Autopole2®
and Autopole®.

