

COPYRIGHT:

ALL ARTWORK, PICTURES AND TEXTS ARE COVERED BY OUR COPY-RIGHT.

THEY MUST NOT BE COPIED FOR REPRODUCTION (E.G. ON CD-ROM DISKS OR INTERNET-SITES) OR USED IN THEIR ENTIRE FORM OR IN EXCERPTS WITHOUT OUR PREVIOUS WRITTEN AGREEMENT.

IF YOU ARE DOWNLOADING PDF-FILES FROM OUR INTERNET HOME-PAGE FOR YOUR PERSONAL USE, MAKE SURE TO CHECK FOR UPDATED VERSIONS.

WE CANNOT TAKE ANY LIABILITY WHATSOEVER FOR DOWNLOADED FILES, AS TECHNICAL DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

COPYRIGHT:

DIESE DRUCKSCHRIFT UND ALLE IHRE BESTANDTEILE IST URHEBERRECHTLICH GESCHÜTZT.

ABBILDUNGEN, GRAFISCHE DARSTELLUNGEN, TEXTE ODER DIE DRUCKSCHRIFT INSGESAMT ODER IN TEILEN DÜRFEN NICHT OHNE VORHERIGE SCHRIFTLICHE GENEHMIGUNG NACHGEDRUCKT ODER SONST REPRODUZIERT WERDEN (Z. B. AUF CD-ROM ODER IM INTERNET).

WENN SIE DIESE PDF-DATEI FÜR IHREN PERSÖNLICHEN GEBRAUCH VON UNSERER INTERNET-SEITE KOPIERT HABEN, MÖCHTEN WIR DARAUF HINWEISEN, DASS ALLE DORT ZUR VERFÜGUNG GESTELLTEN DATEIEN OHNE JEDEN WEITERN HINWEIS AUF DEN NEUESTEN TECHNISCHEN STAND GEBRACHT WERDEN. DIE ÄNDERUNG VON TECHNISCHEN DATEN UND LIEFERUMFANG IST DAHER VORBEHALTEN.

**CYC &
FLOOD
LIGHT**



ARRI 

ARRI CYC & FLOOD LIGHT RANGE



The Cyc and Flood range are the big brothers of the Minifloods and utilise the 189mm linear lamps to give a choice of power rating up to 1250W for lighting the largest cycs evenly.

The product line covers five different variations: The FLOOD 1250 Single flood-light, as well as 4 different products with asymmetrical reflectors – the CYC 1250 Single, Double, 4-In-Line unit and the Cube arrangement to match all applications up to the requirements of the largest studios and theatres. An optional floor stand set allows units to be used to serve as a groundrow. All are available both in manual and pole operated versions.

The housing features die cast aluminium side panels, a quick-change reflector, and a mesh-less double protection glass. A specially designed accessory holder eliminates any risk of the filter frame and protective glass from coming out unintentionally. The housing design optimises the operating temperature to


maximise lamp and component life. The double protection glass guarantees a long lifetime for the colour filters.

With the optimised reflector for the powerful 1250W tungsten halogen lamp, the new CYC 1250 and FLOOD 1250 range offers top quality lighting and excellent light output.

Features of the ARRI CYC / FLOOD 1250 range:

- Rugged lightweight casing construction
- Optimised reflector
- High light efficiency with 189mm 1250W lamps
- Double protection glass for longer filter life
- Quick-release filter frames
- Integrated carrying handle
- Available in both manual and pole operated version
- Available as Single, Double, 4-In-Line and 4-Cube



For further information: www.arri.com

ARRI MINIFLOOD
1000W

Colours:

**Manual:** L1.82000.B L1.82001.B L1.82005.B**Technical Data:**


Length (mm): 140H x 267W x 110L
 Weight (kg): 1.6
 Lamp: P2/11 800W 230V
 P2/20 1000W 230V
 Base: R7s

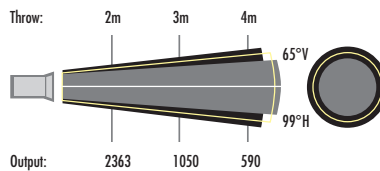Light Output (lux):**Accessories:**Small Kit Stand
LS.1Mini Turtle Base
LS.003MARRI MINICYC
1000W

Colours:

**Manual:** L1.82100.B L1.82101.B L1.82105.B**Technical Data:**

Length (mm): 140H x 267W x 110L
 Weight (kg): 1.6
 Lamp: P2/11 800W 230V
 P2/20 1000W 230V
 Base: R7s

Accessories:Small Kit Stand
LS.1Mini Turtle Base
LS.003M**ARRI MINIFLOOD & MINICYC**

The ARRI MINIFLOOD and asymmetric MINICYC compliment the Arrilite and Junior lampheads for portable and small studio lighting wherever large area coverage is required. The rugged, corrosion resistant aluminium housings are built to the same high standards as ARRI spotlights for reliability and long service life.

The widely available 119mm linear lamps offer a choice of power and voltage up to 1000W operation. Both reflector variations are supplied with integral two leaf extendable doors as standard and three different colour options are available.

Features of the MINIFLOOD and MINICYC 1000 range:


- Compact construction utilising 119mm lamp
- Optimised reflector
- High light efficiency
- 2-leaf extendable barndoor as standard
- With symmetrical or asymmetrical reflectors
- Available in three different casing colours

1000 lux gives correct exposure for 200ASA film with aperture f4 at 24fps 1/48th sec.

In order to maintain the highest standards, ARRI reserves the right to alter specifications without notice.
 © ARRI (GB) Ltd

ARRI FLOOD 1250 1250W




Colours: 
Manual: L1.843W.B
P.O.: L1.84300.I

Technical Data:

Length (mm): 400H x 410W x 195L
 Weight (kg): 5.0
 Lamp: P2/10 625W/230V
 P2/7 1000W/230V
 P2/12 1250W/230V
 Base: R7s

Light Output:

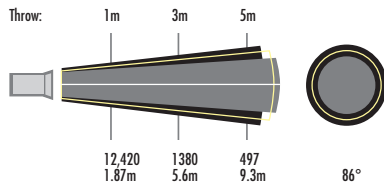

Accessories:


4-leaf barndoor
 L2.84240.0

Diffuser frame
 L2.84245.0

Floor stand set
 L2.84223.0

ARRI CYC 1250 1250W



Colours: 
Manual: L1.84200.B
P.O.: L1.84200.I

Technical Data:


Length (mm): 400H x 410W x 195L
 Weight (kg): 5.0
 Lamp: P2/10 625W/230V
 P2/7 1000W/230V
 P2/12 1250W/230V
 Base: R7s

Accessories:

Diffuser frame
 L2.84245.0


Floor stand set
 L2.84223.0

Light Output for Single Cyc 1250W Positioned Vertically:

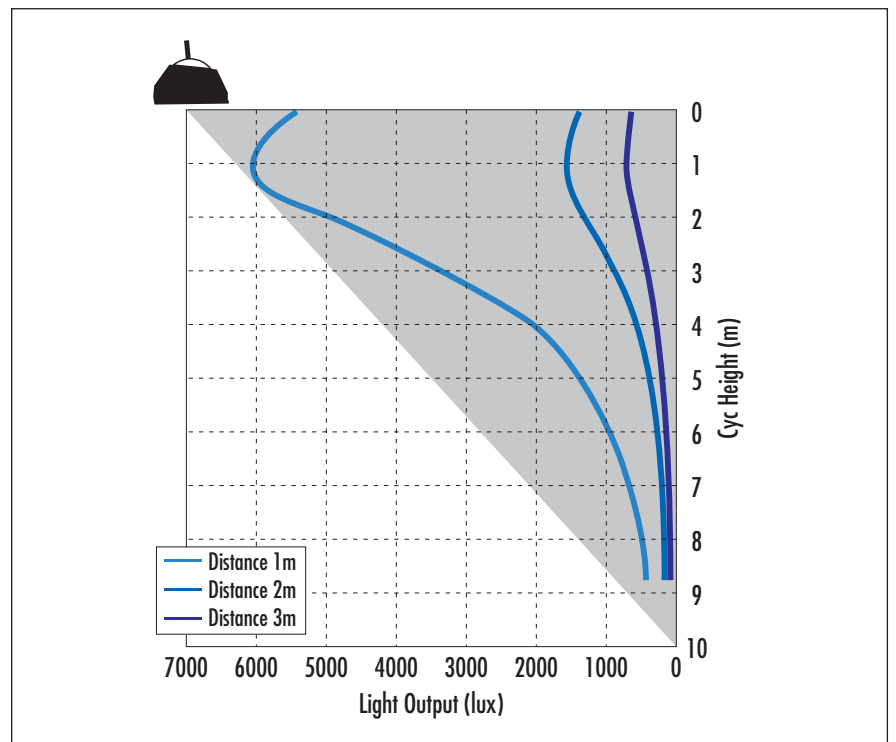

ARRI CYC 1250, Double 2 x 1250W



Colours: 
Manual: L1.84210.B
P.O.: L1.84210.I

Technical Data:

Length (mm): 445H x 710W x 195L
 Weight (kg): 8.0
 Lamp: P2/10 625W/230V
 P2/7 1000W/230V
 P2/12 1250W/230V
 Base: R7s

Accessories:

Diffuser frame
 L2.84245.0

Floor stand set
 L2.84223.0

ARRI CYC 1250, 4-In-Line 4 x 1250W



Colours:
Manual: L1.84220.B
P.O.: L1.84220.1

Technical Data:

Length (mm): 400H x 1370W x 195L
 Weight (kg): 14
 Lamp: P2/10 625W/230V
 P2/7 1000W/230V
 P2/12 1250W/230V
 Base: R7s

Accessories:

Diffuser frame
 L2.84245.0

Floor stand set
 L2.84223.0

ARRI CYC 1250, 4-Cube 4 x 1250W



Colours:
Manual: L1.84230.B
P.O.: L1.84230.1

Technical Data:

Length (mm): 830H x 710W x 195L
 Weight (kg): 15.5
 Lamp: P2/10 625W/230V
 P2/7 1000W/230V
 P2/12 1250W/230V
 Base: R7s



Accessories:

Diffuser frame
 L2.84245.0

ARRI Original Accessories

LS.635 Super Clamp, Quick Action
 LE.6000.A Spigot 16 mm
 LS.137CB Safety Cable

Photometric Calculator

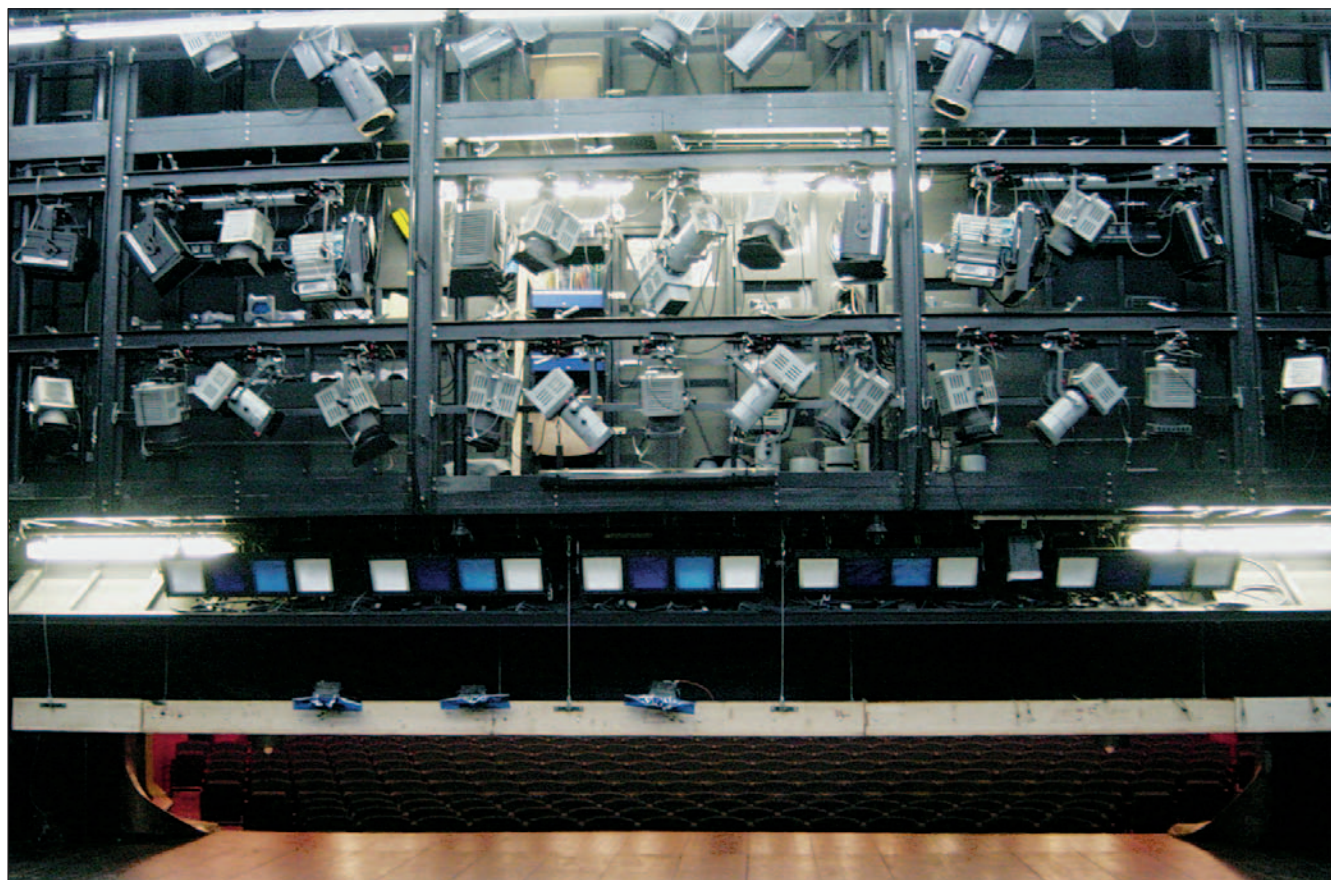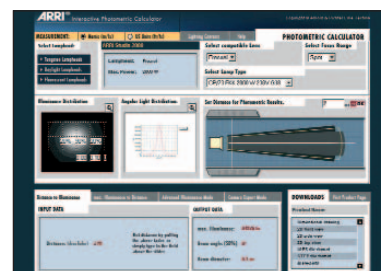

Installation of ARRI CYC in the Munich theatre

ARNOLD & RICHTER CINE TECHNIK

Lichttechnik, Pulvermühle,
83071 Stephanskirchen
Tel +49 80 36 3009 84
Fax +49 80 36 3009 79



ARRI LIGHTING SOLUTIONS GMBH

AGASTR. 24
D-12489 BERLIN
Tel +49 (0) 30 678-233-0
Fax +49 (0) 30 678-233-99

ARRI ITALIA S.r.l.

Viale Edison 318,
20099 Sesto S. Giovanni, Milano
Tel +39 02-26 22 71 75
Fax +39 02-242 16 92

ARRI INC. NEW YORK OFFICE

617 Route 303
Blauvelt, NY 10913-1109
Tel +1 845-353-14 00
Fax +1 845-425-12 50

ARRI CANADA Ltd.

415 Horner Avenue, Unit 11,
Etobicoke, Ontario, M8W 4W3,
Tel +1 416-255 33 35
Fax +1 416-255 33 99



ARRI (GB) Limited

2 Highbridge, Oxford Road, Uxbridge, Middlesex UB8 1LX

Tel: +44 (0)1895 457000 **Fax:** +44 (0)1895 457001

Email: sales@arri-gb.com **Web:** www.arri.com