




HARD CASES  
100% MADE IN ITALY



*From the European Leader in  
Technical Cases Manufacturing*

[www.explorercases.com](http://www.explorercases.com)






# BUILT STRONGER TO LAST LONGER



Explorer Cases are the first of their kind to be manufactured in Europe, indeed their clean lines and good looks reflect their Italian heritage. We have produced a range of virtually indestructible durable waterproof cases providing a solution for any equipment requiring a high level of protection. Applications range from Military and Aerospace to Computer and Equipment cases while their dust and waterproof qualities offer absolute protection making them ideal for use in the harshest environment.

The Explorer Cases have been subjected to a series of controlled laboratory tests to prove their suitability for use in the most extreme and hazardous applications and ensure that they meet the exacting standards of: IP67 Dustproof - Waterproof; Defence Standard 81-41 Level J; STANAG 4280 (edition 2); Conformity with the Directive 2002/95/EC - MIL-STD 810F/810G (depending on models) - Nato Stock Number (NSN) available on demand.

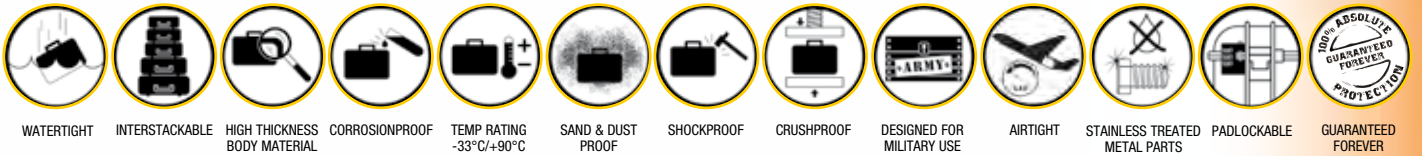

- WATERTIGHT
- INTERSTACKABLE
- HIGH THICKNESS BODY MATERIAL
- CORROSIONPROOF
- TEMP RATING -33°C/+90°C
- SAND & DUST PROOF
- SHOCKPROOF
- CRUSHPROOF
- DESIGNED FOR MILITARY USE
- AIRTIGHT
- STAINLESS TREATED METAL PARTS
- PADLOCKABLE
- GUARANTEED FOREVER PROTECTION



SMALL CASES

MEDIUM CASES

LARGE CASES





# OUR SUPERIOR FEATURES



- Made of Copolymer Polypropylene compound
- Waterproof, resistant to chemicals, humidity, dust
- Resistant to harsh temperatures (-33°C / +90°C)
- Jam-free purge valve and latches
- Recommended for professional applications
- 100% made in Italy: Italian design and proven functionality
- First to achieve the new military standard qualifications
- Recognized as the most versatile case to customize
- Widest choice of accessories to customize your experience
- Incorporate a number of patented innovations

More information on [www.explorercases.com](http://www.explorercases.com)



1908		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	190	125	85	20	65
	in	7 1/2	4 15/16	3 3/8	13/16	2 9/16
External dim.	mm	216	180	102		
	in	8 1/2	7 1/16	4		
Weight empty	kg 0,70		lbs 1.54			
Weight w/foam	kg 0,80		lbs 1.76			
Volume	lt 2,0		gal 0.52			
Buoyancy	kg/max 1,4		lbs/max 3.08			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available



Art. SHOULDERKIT.U



1913		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	190	125	135	20	115
	in	7 1/2	4 15/16	5 5/16	13/16	4 1/2
External dim.	mm	216	180	152		
	in	8 1/2	7 1/16	6		
Weight empty	kg 0,85		lbs 1.87			
Weight w/foam	kg 0,92		lbs 2.02			
Volume	lt 3,2		gal 0.79			
Buoyancy	kg/max 2,4		lbs/max 5.29			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available

**ABSOLUTE  
 GUARANTEED  
 FOREVER  
 PROTECTION**



<b>2209</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	95	20	75
	in	8 11/16	6 5/16	3 3/4	13/16	2 15/16
External dim.	mm	246	215	112		
	in	9 11/16	8 7/16	4 7/16		
Weight empty	kg 0,88		lbs 1.94			
Weight w/foam	kg 0,99		lbs 2.18			
Volume	lit 3,3		gal 0.79			
Buoyancy	kg/max 2,3		lbs/max 5.07			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available



Art. SHOULDERKIT.U



**100% ABSOLUTE  
GUARANTEED  
FOREVER  
PROTECTION**



<b>2214</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	145	20	125
	in	8 11/16	6 5/16	5 11/16	13/16	4 15/16
External dim.	mm	246	215	162		
	in	9 11/16	8 7/16	6 3/8		
Weight empty	kg 1,16		lbs 2.56			
Weight w/foam	kg 1,29		lbs 2.84			
Volume	lt 5,1		gal 1.32			
Buoyancy	kg/max 3,9		lbs/max 8.59			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available



Art. SHOULDERKIT.U




		2712		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	276	200	120	35	85		
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8		
External dim.	mm	305	270	144				
	in	12	10 5/8	5 11/16				
Weight empty	kg	1,62		lbs		3.57		
Weight w/foam	kg	1,83		lbs		4.03		
Volume	lt	6,6		gal		1.58		
Buoyancy	kg/max	4,2		lbs/max		9.25		
Temp. rating	°C	min -33 max +90		°F		min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)							
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>		
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty		

- Lid can be set to slide-off (see pg. 28 for details)
- Can accommodate BAG-R and PANEXPL27




Counterbalance supports (2712 and 2717 mod.)

2712	LID	BASE
	PANEXPL27	BAG-R



		2717		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	276	200	170	35	135		
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16		
External dim.	mm	305	270	194				
	in	12	10 5/8	7 5/8				
Weight empty	kg	1,93		lbs		4.25		
Weight w/foam	kg	2,12		lbs		4.67		
Volume	lt	9,3		gal		2.37		
Buoyancy	kg/max	6,7		lbs/max		14.77		
Temp. rating	°C	min -33 max +90		°F		min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)							
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>		
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty		

- Lid can be set to slide-off (see pg. 28 for details)
- Can accommodate BAG-S and PANEXPL27

2717	LID	BASE
	PANEXPL27	BAG-S




		3317		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	330	234	170	68	102		
	in	13	9 3/16	6 11/16	2 11/16	4		
External dim.	mm	360	304	194				
	in	14 3/16	11 15/16	7 5/8				
Weight empty	kg	2,29		lbs		5.04		
Weight w/foam	kg	2,51		lbs		5.53		
Volume	lt	13,1		gal		3.43		
Buoyancy	kg/max	7,0		lbs/max		15.43		
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)							
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>		
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty		

- Lid can be set to slide-off (see pg. 28 for details)
- Can accommodate BAG-T and PANEXPL33



Counterbalance supports

3317	LID	BASE
	PANEXPL33	BAG-T




		3317W		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	330	350	170	68	102		
	in	13	13 3/4	6 11/16	2 11/16	4		
External dim.	mm	360	420	194				
	in	14 3/16	16 9/16	7 5/8				
Weight empty	kg	2,92		lbs		6.43		
Weight w/foam	kg	3,30		lbs		7.27		
Volume	lt	19,6		gal		5.17		
Buoyancy	kg/max	10,6		lbs/max		23.36		
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)							
Versions	<b>B</b>	<b>BE</b>						
	black w/foam	black empty						

- Lid can be set to slide-off (see pg. 28 for details)
- Can accommodate BAG-U and PANEXPL33W



Counterbalance supports

3317W	LID	BASE
	PANEXPL33W	BAG-U






<b>3818</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	380	270	180	45	135
	in	14 15/16	10 5/8	7 1/16	1 3/4	5 5/16
External dim.	mm	410	340	205		
	in	16 1/8	13 3/8	8 1/16		
Weight empty	kg	3,14		lbs 6.92		
Weight w/foam	kg	3,58		lbs 7.89		
Volume	lit	18,4		gal 4.75		
Buoyancy	kg/max	12,4		lbs/max 27.33		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Soft grip rubber handle
- Can accommodate BAG-E and PANEXPL38

Counterbalance supports






<b>4412</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	125	47	78
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16
External dim.	mm	474	415	149		
	in	18 11/16	16 5/16	5 7/8		
Weight empty	kg 3,40		lbs 7.49			
Weight w/foam	kg 3,90		lbs 8.59			
Volume	lt 19,2		gal 5.01			
Buoyancy	kg/max 10,7		lbs/max 23.58			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty
	<b>BC</b>	<b>GC</b>				
	black w/pc bag	mil. green w/pc bag				

- Lid can be set to slide-off (see pg. 28 for details)
- Stainless steel reinforced padlockable points
- Optional shoulder strap available
- Soft grip rubber handle
- Counterbalance supports
- Can accommodate BAG-PC44 and PANEXPL44

<b>4412</b>	LID	BASE
	PANEXPL44	BAG-PC44



Stainless steel reinforced padlockable points



### 4412.B C

- 4412.B C** and **4412.G C** models include:
- computer bag with shoulder strap (mod. BAG-PC44)
  - organized lid panel (mod. PANEXPL44)
  - shoulder strap attachment metal pins kit to fix the shoulder strap also on the case (SHOULDER KIT.U)



# OUR FULL WARRANTY



"We want you to count on Explorer Cases as the most reliable resource to carry your valuable equipment in the harshest environments.

That's why you can count FOREVER on our cases warranty against breakage of materials and defects on workmanship that could affect the integrity of what you carry inside.

After all, it is not by coincidence that all of our cases have met the most rigorous military standard qualifications and are now so popular in extreme environments, no matter what human being, animal or fish you come across in your life journey."

\* Warranty valid only if the case has not been subject to abuse, misuse, negligence or accident.

See full details on [www.explorercases.com](http://www.explorercases.com)



4419		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	190	47	143
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8
External dim.	mm	474	415	214		
	in	18 11/16	16 5/16	8 7/16		
Weight empty	kg 4,00		lbs 8.81			
Weight w/foam	kg 4,70		lbs 10.36			
Volume	lt 29,2		gal 7.66			
Buoyancy	kg/max 19,7		lbs/max 43.43			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)
- Stainless steel reinforced padlockable points
- Optional shoulder strap available
- Soft grip rubber handle
- Can accommodate BAG-A and PANEXPL44



Stainless steel reinforced padlockable points




Art. SHOULDERKIT.U

4419	LID	BASE
	PANEXPL44	BAG-A



4820		L	W	D			
		LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	480	370	205	50	155	
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8	
External dim.	mm	520	435	230			
	in	20 1/2	17 1/8	9 1/16			
Weight empty		kg 4,64		lbs 10.22			
Weight w/foam		kg 5,40		lbs 11.90			
Volume		lt 35,5		gal 9.24			
Buoyancy		kg/max 24,7		lbs/max 54.45			
Temp. rating		°C min -33 max +90		°F min -27.4 max +194			
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
		MIL-STD 810G					
Versions		<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
		black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Soft grip rubber handle
- Can accommodate BAG-F or BAG-PC48 and PANEXPL48




Splittable, padded PC and divider bag. It is the ideal solution for carrying and protecting both computer (17" size) and photographic equipment. Adjustable shoulder belt included. This optional bag perfectly fits into the 4820 model case. (Art. BAG-PC48)



5117		L	W	D			
		LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	517	277	173	50	123	
	in	20 3/8	10 7/8	6 13/16	1 15/16	4 13/16	
External dim.	mm	546	347	197			
	in	21 1/2	13 11/16	7 3/4			
Weight empty		kg 3,80		lbs 8.37			
Weight w/foam		kg 4,50		lbs 9.92			
Volume		lt 24,7		gal 6.34			
Buoyancy		kg/max 15,8		lbs/max 34.83			
Temp. rating		°C min -33 max +90		°F min -27.4 max +194			
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions		<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
		black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)
- Optional shoulder strap available
- Soft grip rubber handle
- Can accommodate BAG-B and PANEXPL51



Art. SHOULDERKIT.U



5122	L		W		D	
	LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	517	277	217	50	167
	in	20 3/8	10 7/8	8 9/16	1 15/16	6 9/16
External dim.	mm	546	347	247		
	in	21 1/2	13 11/16	9 3/4		
Weight empty	kg 6,00		lbs 13.22			
Weight w/foam	kg 7,00		lbs 15.43			
Volume	lt 31,0		gal 8.18			
Buoyancy	kg/max 21,5		lbs/max 47.39			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)
- Soft grip rubber handle
- Can accommodate BAG-B and PANEXPL51



Easy to open release telescopic handle



Wheels with bearings

517-5122	LID	BASE
	PANEXPL51	BAG-B



<b>5325</b>		L	W	D		
	LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	607	475	275		
	in	23 7/8	18 11/16	10 13/16		
Weight empty		kg 7		lbs 15.43		
Weight w/foam		kg 8,25		lbs 18.18		
Volume		lt 53		gal 14.00		
Buoyancy		kg/max 37,2		lbs/max 82.01		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/odm	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)
- Stainless steel reinforced padlockable points
- Side handles
- Soft grip rubber handle
- Can accommodate 2xBAG-V or 2xDIV-V or 1xBAG-V+1xDIV-V and PANEXPL53

5325-5326	LID PANEXPL53	BASE 2x BAG-V
	BASE 1x BAG-V + 1x DIV-V	BASE 2x DIV-V



Stainless steel reinforced padlockable points

# CERTIFICATIONS

- IP67 Waterproof, dustproof
- Defence Standard 81-41 Level J
- STANAG 4280 (edition 2)
- Conformity with the Directive 2002/95/EC
- MIL-STD 810F/810G (depending on models)
- Nato Stock Number (NSN) on demand

Certificates available for download on [www.explorercases.com](http://www.explorercases.com)



<b>5326</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	627	475	292		
	in	24 11/16	18 11/16	11 1/2		
Weight empty	kg	10		lbs 22.04		
Weight w/foam	kg	11,25		lbs 24.80		
Volume	lt	53		gal 14.00		
Buoyancy	kg/max	37,2		lbs/max 82.01		
Temp. rating	°C	min -33	max +90	°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)
- Stainless steel reinforced padlockable points
- Side handles
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 2xBAG-V or 2xDIV-V or 1xBAG-V+1xDIV-V and PANEXPL53

5325-5326	LID PANEXPL53	BASE 2x BAG-V
	BASE 1x BAG-V + 1x DIV-V	BASE 2x DIV-V



Self-oiling free running wheels and telescopic handle with quick and safe lock/unlock system

Stainless steel reinforced padlockable points



<b>5822</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	650	510	245		
	in	25 9/16	20 1/16	9 5/8		
Weight empty	kg	7,16		lbs 15.78		
Weight w/foam	kg	8,39		lbs 18.49		
Volume	lt	56,1		gal 14.79		
Buoyancy	kg/max	36,7		lbs/max 80.90		
Temp. rating	°C	min -33	max +90	°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810F					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Soft grip rubber handle
- Can accommodate 2xBAG-G and PANEXPL58

5822-5823	LID PANEXPL58	BASE 2x BAG-G



5823		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	670	510	262		
	in	26 3/8	20 1/16	10 5/16		
Weight empty	kg 9,17		lbs 20.21			
Weight w/foam	kg 10,40		lbs 22.92			
Volume	lt 56,1		gal 14.79			
Buoyancy	kg/max 36,7		lbs/max 80.90			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 2xBAG-G and PANEXPL58

5822-5823	LID PANEXPL58	BASE 2x BAG-G



Self-oiling free running wheels



Telescopic handle with quick and safe lock/unlock system



5833		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	330	60	270
	in	22 13/16	17 5/16	13	2 3/8	10 5/8
External dim.	mm	670	510	372		
	in	26 3/8	20 1/16	14 5/8		
Weight empty	kg 10,54		lbs 23.23			
Weight w/foam	kg 12,65		lbs 27.88			
Volume	lt 84,2		gal 22.19			
Buoyancy	kg/max 62,0		lbs/max 136.68			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810F					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 2xBAG-G+2xDIV-I or 2xDIV-H or 1xBAG-G+1xDIV-I+1xDIV-H and PANEXPL58

5833	LID PANEXPL58	BASE 2x BAG-G + 2x DIV-I
BASE 1x BAG-G + 1x DIV-I + 1x DIV-H		BASE 2x DIV-H



Self-oiling free running wheels



Telescopic handle with quick and safe lock/unlock system



**100% ABSOLUTE  
GUARANTEED  
PROTECTION**



<b>7630</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	765	485	305	60	245
	in	30 1/8	19 1/8	12	2 3/8	9 5/8
External dim.	mm	860	560	355		
	in	33 7/8	22 1/16	14		
Weight empty	kg	13,56		lbs	29.89	
Weight w/foam	kg	16,39		lbs	36.13	
Volume	lit	113,1		gal	29,85	
Buoyancy	kg/max	81,8		lbs/max	180,33	
Temp. rating	°C	min -33	max +90	°F	min -27,4	max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810F					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles and large front handle
- Wheels and retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate 4xBAG-L or 2xBAG-M or 2xBAG-L+1xBAG-M or 2xDIV-N or 2xBAG-L+1xDIV-N and PANEXPL76

7630	LID PANEXPL76	BASE 4x BAG-L
		BASE 2x BAG-M
		BASE 2x BAG-L + 1x DIV-N
		BASE 2x BAG-L + 1x BAG-M



Two man lift side handles




Self-oiling free running wheels



Stainless steel reinforced padlockable points



Back Retractable handle



Front



7641		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	765	485	415	60	355
	in	30 1/8	19 1/8	16 5/16	2 3/8	14
External dim.	mm	860	560	460		
	in	33 7/8	22 1/16	18 1/8		
Weight empty	kg 15,02		lbs 33.11			
Weight w/foam	kg 18,87		lbs 41.60			
Volume	lt 153,9		gal 40.41			
Buoyancy	kg/max 118,5		lbs/max 261.24			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810F					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Wheels and retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate 4xBAG-O or +2xBAG-P or 2xBAG-O+1xBAG-P or 2xDIV-Q or 2xBAG-O+1xDIV-Q and PANEXPL76



Two man lift side handles



Self-oiling free running wheels



Stainless steel reinforced padlockable points



Back Retractable handle



Front

7641	LID	BASE
	PANEXPL76	4x BAG-O
	BASE 2x DIV-Q	BASE 2x BAG-P
	BASE 2x BAG-O + 1x DIV-Q	BASE 2x BAG-O + 1x BAG-P

# THE RANGE



The Explorer Cases are available in several different sizes with four standard colours and two main standard configurations. Special colours are available on request depending on quantity.

It is possible to personalize the interiors into various configurations; the clean internal lines provide the ideal case for foam convertors and custom foam fitting and the pre cubed foam allows the user to tailor the insert to their own individual requirement. In addition the cases are moulded with location points offering the easy insertion of special supports for panel mounting, panel rings, to easily create your customized solution.



<b>9413</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	939	352	137	43	94
	in	36 15/16	13 7/8	5 3/8	1 11/16	3 11/16
External dim.	mm	989	415	157		
	in	38 15/16	16 5/16	6 3/16		
Weight empty		kg 6,70		lbs 14.77		
Weight w/foam		kg 7,70		lbs 16.97		
Volume		lt 45,3		gal 11.96		
Buoyancy		kg/max 27,9		lbs/max 61.50		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>G</b>	<b>D</b>	<b>BE</b>	<b>GE</b>	<b>DE</b>
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty



Two man lift side handles



Wheels with bearings



Art. SHOULDERKIT.U

- Side handles
- Large front handle
- Wheels
- Optional shoulder strap available
- Can accommodate GBAG 94



Digital locks on demand (case code + DL)



<b>11413</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1136	350	135	42	93
	in	44 3/4	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1189	415	159		
	in	46 13/16	16 5/16	6 1/4		
Weight empty		kg 7,80		lbs 17.19		
Weight w/foam		kg 8,80		lbs 19.40		
Volume		lt 53,7		gal 14.18		
Buoyancy		kg/max 33,3		lbs/max 73.41		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>G</b>	<b>D</b>	<b>BE</b>	<b>GE</b>	<b>DE</b>
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty



Two man lift side handles



Wheels with bearings



Art. SHOULDERKIT.U

- Side handles
- Large front handle
- Wheels
- Optional shoulder strap available
- Can accommodate GBAG 114



100% A  
GU  
A



Art. SHOULDERKIT.U



Two man lift side handles



Wheels with bearings

13513		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1350	350	135	42	93
	in	53 1/8	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1410	415	159		
	in	55 1/2	16 5/16	6 1/4		
Weight empty		kg 8,70		lbs 19.18		
Weight w/foam		kg 9,95		lbs 21.93		
Volume		lt 63,7		gal 16.82		
Buoyancy		kg/max 39,5		lbs/max 87.08		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>G</b>	<b>D</b>	<b>BE</b>	<b>GE</b>	<b>DE</b>
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Side handles
- Large front handle
- Wheels
- Optional shoulder strap available
- Can accommodate GBAG 135



Digital locks on demand (case code + DL)



Digital locks on demand (case code + DL)



Two man lift side handles



6 wheels with bearings

13527		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1350	350	272	42	230
	in	53 1/8	13 3/4	10 11/16	1 5/8	9 1/16
External dim.	mm	1430	415	296		
	in	56 5/16	16 5/16	11 5/8		
Weight empty		kg 11,70		lbs 25.79		
Weight w/foam		kg 14,90		lbs 32.84		
Volume		lt 128,5		gal 33.94		
Buoyancy		kg/max 97,5		lbs/max 214.95		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>G</b>	<b>D</b>	<b>BE</b>	<b>GE</b>	<b>DE</b>
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Side handles
- Large front handle
- Wheels
- Can accommodate 2xGBAG 135

**ABSOLUTE  
GUARANTEED  
FOREVER  
PROTECTION**

# MULTI-WEAPONS CONFIGURATIONS

**NEW**

Models: **10826.B - 10826.BE - 10826.B D2 - 10826.B D4**

Models 10826.B D2 and 10826.B D4 are set with internal pre-shaped foam bedding and metal lock bars for 12 magazines and 6 most used weapons, such as: G36, MP5, M4, M16, AR 70/90 guns models.

All mentioned trademarks and brands are property of their respective owners.

**OTHER WEAPONS RACKING SYSTEM CONFIGURATIONS ARE AVAILABLE**



Lockable stronger metal bar to secure the weapons



Stainless steel reinforced padlockable points and heavy duty metal latches



**mod. 10826.B D4**  
Removable lid



**mod. 10826.B D2**  
Hinged lid and metal support stays



4 self-oiling free running wheels

- 10826.B** - With plastic latches, hinged lid and metal support stays, internal precubed foam layers, convoluted foam in the lid.
- 10826.BE** - With plastic latches, hinged lid and metal support stays, empty.
- 10826.B D2** - Weapons racking system with one metal bar, hinged lid and metal latches.
- 10826.B D4** - Weapons racking system with metal bar, removable lid and metal latches.

<b>10826</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	260	60	200
	in	42 1/2	24 7/16	10 1/4	2 3/8	7 7/8
External dim.	mm	1178	725	287		
	in	46 3/8	28 1/4	11 5/16		
Weight empty		kg 17		lbs 37.47		
Weight w/foam		kg 20,40		lbs 44.97		
Weight w/multi weapons foam		kg 19,60		lbs 43.21		
Volume		lt 174		gal 45.96		
Buoyancy		kg/max 120,6		lbs/max 265.87		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Versions	<b>B</b>	<b>BE</b>	<b>BD2</b>	<b>BD4</b>		
	black w/foam	black empty	black w/weapons foam-lid not rem.	black w/weapons foam-remov. lid		



- Can accommodate 4xGBAG 108



4 self-oiling free running wheels



4 Stainless steel reinforced padlockable points



12 HEAVY DUTY METAL LATCHES grant a more reliable retaining during rough handling.

<b>10840</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	400	200	200
	in	42 1/2	24 7/16	15 3/4	7 7/8	7 7/8
External dim.	mm	1178	718	427		
	in	46 3/8	28 1/4	16 13/16		
Weight empty	kg	19,80		lbs 43.65		
Weight w/foam	kg	26,30		lbs 57.32		
Weight w/multi weapons foam	kg	25,00		lbs 55.11		
Volume	lt	260		gal 68.68		
Buoyancy	kg/max	120,6		lbs/max 265.87		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>G</b>	<b>BE</b>	<b>GE</b>	<b>BD1</b>	<b>GD1</b>
	black w/foam	mil. green w/foam	black empty	mil. green empty	black w/hum. ind. weapons foam	green w/hum. ind. weapons foam
	<b>BD2</b>	<b>GD2</b>				
	black with multi weapons foam	mil. green w/multi weapons foam				



# MULTI-WEAPONS CONFIGURATIONS

Models: **10840.B D1 - 10840.G D1 - 10840.B D2 - 10840.G D2**

All cases mentioned above are set with internal pre-shaped foam bedding and metal lock bars for 12+12 magazines and 6+6 most used weapons, such as: G36, MP5, M4, M16, AR 70/90 guns models. (All mentioned trademarks and brands are property of their respective owners).


**OTHER WEAPONS RACKING SYSTEM CONFIGURATIONS ARE AVAILABLE**



It has a color-change **replaceable** card which turns from blue to lavender to pink as the humidity increases. (Art. ASP.0010)



**HUMIDITY INDICATOR**  
(10840.B D1 and 10840.G D1 mod.)



Lockable stronger metal bar to secure the weapons



Digital locks on demand (case code + DL)



- Detachable lid for easier access
- Folding side handles on both shells
- Two man lift large folding side handles



Metal bracket (Art. EX.METALPLATE 2 pcs) to secure the whole case or the single shell to the wall in order to create a permanent or mobile armoury. Can also be used in special vehicles configurations or deployed in the field. The case (or both open shells separately) is hanged to the metal bracket by mean of its upper external handle, therefore easy to be applied and removed. The metal bracket has been studied to be fixed with a padlock to the case handle to avoid accidental releases or thefts (padlock not included).



Art. PANDIV.10840 Optional.

To hold the lid foam content steady in place.

The kit includes:

- 1 alveolar polypropylene sheet
- 4 velcro straps
- 8 metal loops and fixing hardware



# PADDED GUN BAGS

Heavy duty padded gunbags designed in different sizes to suit most different models of rifles and accessories, to be securely protected and transported.



HEAVY DUTY  
PADDED FABRIC

DURABLE  
ZIPPERS WITH  
NYLON PULLS

NEOPRENE HOOK  
& LOOP SIDE  
FLAPS

ADJUSTABLE  
INTERNAL  
STRAPS TO  
SECURE RIFLE  
POSITION

EXTERNAL PADDED ZIPPED  
POUCHES FOR MAGAZINES  
AND/OR ACCESSORIES



Art. BACKPACK KIT (optional)  
ALL GUNBAGS ARE FITTABLE WITH A  
PRACTICAL, REMOVABLE SHOULDER  
STRAP FOR BACKPACK USE.

CUSTOM SOLUTIONS AVAILABLE  
ON REQUEST.  
MINIMUM QUANTITY APPLIES.





**GBAG 94** Fits case mod. 9413

Ext. Dim. 940x300x70 mm.  
37 x 11 13/16 x 2 3/4



COMPLETE WITH  
SHOULDER STRAP



**GBAG 114** Fits case mod. 11413

Ext. Dim. 1100x300x70 mm.  
43 5/16 x 11 13/16 x 2 3/4



COMPLETE WITH  
SHOULDER STRAP



**GBAG 135** Fits case mod. 13513

Ext. Dim. 1300x300x70 mm.  
51 3/16 x 11 13/16 x 2 3/4



**GBAG 135** Fits case mod. 13527 (2pcs.)

Ext. Dim. 1300x300x70 mm.  
51 3/16 x 11 13/16 x 2 3/4



COMPLETE WITH  
SHOULDER STRAP



**GBAG 108** Fits case mod. 10840 (4pcs.)

Ext. Dim. 1060x360x70 mm.  
41 3/4 x 14 3/16 x 2 3/4



COMPLETE WITH  
SHOULDER STRAP

# MULTI-FUNCTION BAGS AND LID PANELS



A complete set of removable padded bags with handles, internal adjustable dividers and lid panels with pouches available on demand in most of the models. They protect and transport any kind of sensitive equipment and thanks to their modularity, they can be easily combined.



**BAG-R** (fits mod. 2712)  
Ext. Dim. (LxWxD) 270x195x80 mm.  
10 5/8 x 7 11/16 x 3 1/8 in.



**BAG-S** (fits mod. 2717)  
Ext. Dim. (LxWxD) 270x195x130 mm.  
10 5/8 x 7 11/16 x 5 1/8 in.



**BAG-T** (fits mod. 3317)  
Ext. Dim. (LxWxD) 325x230x95 mm.  
12 13/16 x 9 1/16 x 3 3/4 in.



**BAG-U** (fits mod. 3317W)  
Ext. Dim. (LxWxD) 325x340x95 mm.  
12 13/16 x 13 3/8 x 3 3/4 in.



**BAG-E** (fits mod. 3818)  
Ext. Dim. (LxWxD) 375x265x140 mm.  
14 3/4 x 10 7/16 x 5 1/2 in.



**BAG-PC44** (fits mod. 4412)  
Ext. Dim. (LxWxD) 450x345x55 mm.  
17 11/16 x 13 9/16 x 2 3/16 in.



**BAG-A** (fits mod. 4419)  
Ext. Dim. (LxWxD) 450x350x125 mm.  
17 11/16 x 13 3/4 x 4 15/16 in.



**BAG-F** (fits mod. 4820)  
Ext. Dim. (LxWxD) 475x365x160 mm.  
18 11/16 x 14 3/8 x 6 5/16 in.



**BAG-PC48** (fits mod. 4820)  
Ext. Dim. (LxWxD) 475x365x170 mm.  
18 11/16 x 14 3/8 x 6 11/16 in.



**BAG-B** (fits mod. 5117-5122)  
Ext. Dim. (LxWxD) 530x285x135 mm.  
20 7/8 x 11 1/4 x 5 5/16 in.



**BAG-V** (fits mod. 5325-5326)  
Ext. Dim. (LxWxD) 535x410x100 mm.  
21 1/16 x 16 1/8 x 3 15/16 in.



**BAG-G** (fits mod. 5822-5823-5833)  
Ext. Dim. (LxWxD) 435x285x165 mm.  
17 1/8 x 11 1/4 x 6 1/2 in.



**BAG-L** (fits mod. 7630)  
Ext. Dim. (LxWxD) 380x240x240 mm.  
14 15/16 x 9 7/16 x 9 7/16 in.



**BAG-M** (fits mod. 7630)  
Ext. Dim. (LxWxD) 755x240x245 mm.  
29 3/4 x 9 7/16 x 9 5/8 in.



**BAG-O** (fits mod. 7641)  
Ext. Dim. (LxWxD) 382x242x355 mm.  
15 1/16 x 9 1/2 x 14 in.



**BAG-P** (fits mod. 7641)  
Ext. Dim. (LxWxD) 755x240x350 mm.  
29 3/4 x 9 7/16 x 13 3/4 in.



**DIV-H** (fits mod. 5833)  
Ext. Dim. (LxWxD) 435x285x270 mm.  
17 1/8 x 11 1/4 x 10 5/8 in.



**DIV-I** (fits mod. 5833)  
Ext. Dim. (LxWxD) 435x285x110 mm.  
17 1/8 x 11 1/4 x 4 5/16 in.



**DIV-V** (fits mod. 5325-5326)  
Ext. Dim. (LxWxD) 535x410x100 mm.  
21 1/16 x 16 1/8 x 3 15/16 in.



**DIV-N** (fits mod. 7630)  
Ext. Dim. (LxWxD) 485x382x240 mm.  
19 1/8 x 15 1/16 x 9 7/16 in.



**DIV-Q** (fits mod. 7641)  
Ext. Dim. (LxWxD) 485x382x350 mm.  
19 1/8 x 15 1/16 x 13 3/4 in.



**PANEXPL27**  
(fits mod. 2712 and 2717)  
Dim. 255x180 mm.  
10 1/16 x 7 1/16 in.



**PANEXPL33**  
(fits mod. 3317)  
Dim. 310x215 mm.  
12 3/16 x 8 7/16 in.



**PANEXPL33W**  
(fits mod. 3317W)  
Dim. 310x320 mm.  
12 3/16 x 12 5/8 in.



**PANEXPL38** (fits mod. 3818)  
Dim. 375x225 mm.  
14 3/4 x 8 7/8 in.



**PANEXPL44** (fits mod. 4412-4419)  
Dim. 425x305 mm.  
16 3/4 x 12 in.



**PANEXPL48** (fits mod. 4820)  
Dim. 475x325 mm.  
18 11/16 x 12 13/16 in.



**PANEXPL51** (fits mod. 5117-5122)  
Dim. 500x230 mm.  
19 11/16 x 9 1/16 in.



**PANEXPL53** (fits mod. 5325-5326)  
Dim. 525x390 mm.  
20 11/16 x 15 3/8 in.





















**PANEXPL58** (fits mod. 5822-5823-5833)  
Dim. 575x395 mm.  
22 5/8 x 15 9/16 in.



**PANEXPL76** (fits mod. 7630-7641)  
Dim. 755x440 mm.  
29 3/4 x 17 5/16 in.



# CONFIGURATIONS

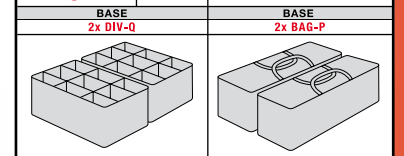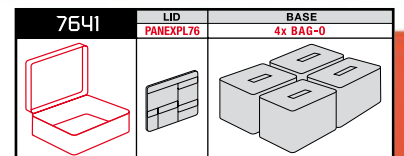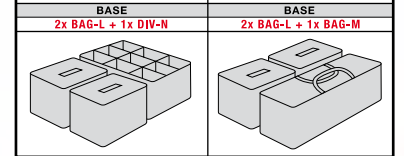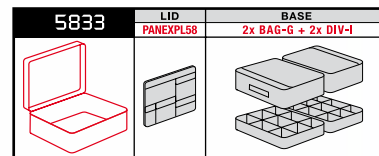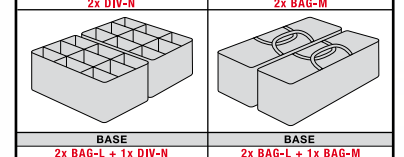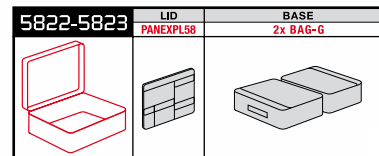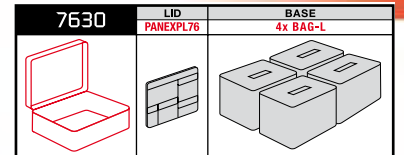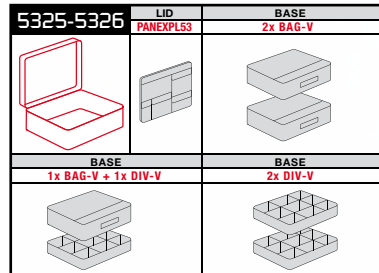



JAM FREE LATCHES WITH EASY-OPENING MECHANISM (from model 3818 on)

ADDITIONAL FIXING POINTS ON THE LID AVAILABLE ON CERTAIN MODELS


SEALING O-RING

EXCLUSIVE PP BASED INJECTION MOLDED BODY GRANTS SUPERIOR RESISTANCE

CORROSION PROOF METAL HINGES WITH LID STAY FEATURE

ALL CASES ARE PROVIDED WITH INTERNAL SLOTS FOR OPTIONAL PANEL MOUNTING BRACKETS OR PANEL MOUNTING RINGS

BY RELEASING THE SCREW LID BECOMES SET TO SLIDE OFF WHEN OPENED AT 70° (available on 2712, 2717, 3317, 3317W, 4412, 4419, 5117, 5122, 5325, 5326 models).

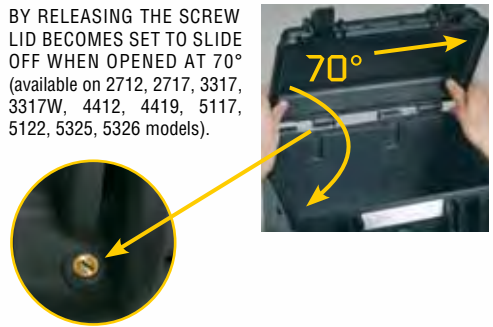

THE  
ED  
R  
ACTION

# MAIN FEATURES

offshore industry - military & police - law enforcement & safety - outdoor - subsea nautical & marine - fire & rescue emergency - medical - photographic broadcasting manufacturing industry and many others.



POSITIVE STACKING LOCATION



THICKER STRUCTURAL FOAM POLYPROPYLENE WALLS GUARANTEE SUPERIOR PERFORMANCE IN EXTREME ENVIRONMENTS

REINFORCED CORNERS

PVC WATERPROOF I.D. REMOVABLE LABEL (Art. LABELCOVER + item nr.)

LOAD TESTED HANDLES REINFORCED WITH CORROSION PROOF STEEL PINS

STANDARD MODELS AVAILABLE EMPTY OR WITH LAYERS OF PRECUBED FOAM IN THE BOTTOM AND CONVOLUTED FOAM IN THE LID. CUSTOM FOAMS AVAILABLE ON DEMAND



SET OF LAYERS OF PRECUBED FOAM FOR THE BOTTOM AND CONVOLUTED FOAM FOR THE LID (Art. FOAM. + item nr.)

SET OF CONVOLUTED FOAM ONLY FOR THE LID - includes 2 pcs. (Art. LIDFOAM. + item nr.)

MANUAL PRESSURE RELEASE VALVE. THE INTERNAL STOP RING PREVENTS VALVE FROM BEING COMPLETELY EXTRACTED (Art. PURGEVALVE.B)

# ACCESSORIES & OEM SOLUTIONS

Explorer Cases are a genuine Made in Italy product of GT Line, european leading company in the manufacturing of technical cases for industrial and commercial applications. Our flexible manufacturing process allows us to easily and efficiently make your OEM case in any special colour and to personalize and develop specific interiors to meet your requirements.



Art. KIT SUPP.PLAST. includes 6 pcs.



Art. KIT SUPP.EXPL. includes 6 pcs.



Art. KIT.EXPL.PLUGS includes 6 pcs.

ALL MODELS (EXCEPT FOR THE 1908) ARE INTERNALLY EQUIPPED WITH SPECIFIC SLOTS, TO APPLY THE OPTIONAL METAL OR PLASTIC BRACKETS WHICH PROVIDE EITHER A PANEL'S FIXING POINTS OR A FIX MECHANICAL JOINT INSIDE THE CASE, TO BUILD MORE COMPLETE APPLICATIONS. THIS WAY THE CASE BECOMES A REAL WORKSTATION, RATHER THAN JUST A CARRYING CONTAINER. AS THE PANEL MOUNTING BRACKETS ARE MECHANICALLY FIXED BY SCREWS, THEY CAN BE REMOVED WHEN NECESSARY. THE DEDICATED SCREWS ALLOW THE CASE TO REMAIN WATERPROOF, AND HELP THE PANELS TO BE REMOVED EASILY AND QUICKLY (KIT SUPP.PLAST. - KIT SUPP.EXPL.) FURTHERMORE, WHENEVER THE SLOTS ARE NOT GOING TO BE USED FOR IN-BUILT APPLICATIONS, THOSE CAN BE CLOSED BY BLIND INSERTS (KIT.EXPL.PLUGS) THAT WILL GIVE THE CASE A BETTER AND FINISHED INTERIOR LOOK.

USER FRIENDLY PANEL FRAMES, THEY CAN BE USED TO FIX SEVERAL KIND OF PANELS, FROM PLASTIC TO ALUMINUM ONES. EQUIPPED WITH AN ADDITIONAL GASKET (WHICH WILL BE SQUEEZED IN BETWEEN THE PANEL AND THE FRAME) THEY CAN PROVIDE THE CASE WITH A PERFECT INSTRUMENTATION SURFACE AND A FURTHER HUMIDITY AND DUST RESISTANCE WHEN THE CASE IS USED IN THE FIELD. COMPLETELY REMOVABLE, RESISTANT AND LIGHT, THESE PANEL RINGS HELP TO TRANSFORM THE EXPLORER CASES INTO PRACTICAL WORKSTATIONS.



Art. PANRING27, PANRING27.USA, PANRING33, PANRING33.USA, PANRING38, PANRING38.USA, PANRING44, PANRING44.USA, PANRING48, PANRING48.USA, PANRING51, PANRING51.USA

PATENTED PADLOCKS DESIGNED TO FIT SNUG TO THE EXPLORER CASE MOULD SO AS NOT TO SWING OUT



PATENTED HEAVY DUTY BRASS PADLOCK (Art. EXPL PADLOCK)



PATENTED COMBINATION PADLOCK (Art. EXPL COMBILOCK)



TSA ACCEPTED COMBI PADLOCK (Art. EXPL TSA.DIGILOCK)



SILICA BOX (Art. KIN.0481)

SILICA BOX, PROVIDED ALONG WITH ITS DESICCANT SILICA GEL, IS USEFUL TO ABSORB EXCESSIVE HUMIDITY AND CONDENSATION FROM TRAPPED AIR INSIDE THE CASES IN HARSH CONDITIONS.



TSA ACCEPTED PADLOCKS ALLOW TSA AIRPORT SECURITY AGENTS TO OPEN THE CASE WITHOUT DESTROYING THE LOCK.



OUR AIM IS ALWAYS TO GRANT MAXIMUM PROTECTION TO THE CONTENT, OPTIMIZING INNER SPACES AND NEVER IGNORING HANDINESS.

CUSTOMIZED INTERNAL CUTTING FOAMS ALLOW A WIDE RANGE OF FLEXIBLE SOLUTIONS IN ORDER TO FULFILL ANY KIND OF NEEDS.



BACKPACK CARRYING SYSTEM MADE FROM ROBUST TEAR-RESISTANT FABRIC AND DESIGNED WITH COMFORTABLE PADDED SHOULDER STRAPS THAT LEAVE YOUR HANDS FREE. AVAILABLE IN TWO ADJUSTABLE SIZES.

Art. BACKPACK M fits 3317 and 5117.

Art. BACKPACK L fits 3317W, 3818, 4412, 4419 and 4820.

WHEREVER A FREE HAND MOVEMENT IS REQUIRED, LIKE OUTDOOR, EXTREME SPORTS, EMERGENCY, RESCUE, TREKKING, INDUSTRIAL, WIND MILLS, SOLAR CELL PANEL MAINTENANCE, ETC.



**MUB**  
MULTI UTILITY BOX  
BY GT LINE



WATER RESISTANT

Art. KIT TRAY MUB (optional) Tray with removable divider for tools, instruments or spare parts. MUB78 can fit up to two trays. Elastic bands for the tray also available (Art. KIT03).

<b>MUB78</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	780	410	330	50	280
	in	30 11/16	16 1/8	13	1 15/16	11
External dim.	mm	807	470	345		
	in	31 3/4	18 1/2	13 9/16		
Weight empty		kg 6,30		lbs 13.88		
Volume		lt 89		gal 23.51		
Buoyancy		kg/max 80,5		lbs/max 177.47		
Certifications	STANAG 4280 (ed. 2) - DEF STAN 81-41 Part 3 - Issue 4					
Versions	<b>MUB78</b>					
	black empty					

- Moulded High Impact Polypropylene
- Moulded integral lifting points on both ends
- Full length steel hinge pin to lid
- Positive grab over latching catches
- Trolley case integral wheels and hinge out pull handle
- Use in high/low temp environments
- Slide out clear ID Nameplate holder
- Large fold flat carry handle
- Padlocking provision
- Stacking location points
- Lightweight



**EXPLORER**  
LITE



WATER RESISTANT

<b>GUNCASE</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	925	420	120	60	60
	in	36 7/16	16 9/16	4 3/4	2 3/8	2 3/8
External dim.	mm	1078	475	157		
	in	42 7/16	18 11/16	6 3/16		
Weight empty		kg 7,1		lbs 15.65		
Weight w/foam		kg 8,1		lbs 17.85		
Volume		lt 46,6		gal 12.31		
Versions	<b>GUNCASE.B</b>	<b>GUNCASE.BE</b>				
	black with convoluted foam	black empty				


- Four easy action quick release "up&over" catches
- Two combination locks
- Manual pressure release valve
- Free running wheels
- Strong metal handle

# TECHNICAL SPECIFICATIONS

CODES	COLORS				INTERNAL CONFIG.	REMOV. LID	WHEELS	WEIGHT KG	BUOYANCY KG MAX	VOLUME LITRES	INTERNAL DIM. (mm)				EXTERNAL DIM. (mm)				
	BLAC	ORANG	M. GREEN	B. BLUE							L	W	D	LID	BASE	L	W	D	
1908	BE	OE	GE		EMPTY			0,7	1,4	2	190	125	85	20	65	216	180	102	
	B	O	G		W/FOAM		0,8												
1913	BE	OE	GE		EMPTY			0,85	2,4	3,2	190	125	135	20	115	216	180	152	
	B	O	G		W/FOAM		0,92												
2209	BE	OE	GE		EMPTY			0,88	2,3	3,3	220	160	95	20	75	246	215	112	
	B	O	G		W/FOAM		0,99												
2214	BE	OE	GE		EMPTY			1,16	3,9	5,1	220	160	145	20	125	246	215	162	
	B	O	G		W/FOAM		1,29												
2712	BE	OE	GE		EMPTY	YES		1,62	4,2	6,6	276	200	120	35	85	305	270	144	
	B	O	G		W/FOAM			1,83											
2717	BE	OE	GE		EMPTY	YES		1,93	6,7	9,3	276	200	170	35	135	305	270	194	
	B	O	G		W/FOAM			2,12											
3317	BE	OE	GE		EMPTY	YES		2,29	7	13,1	330	234	170	68	102	360	304	194	
	B	O	G		W/FOAM			2,51											
3317W	BE				EMPTY	YES		2,92	10,6	19,6	330	350	170	68	102	360	420	194	
	B				W/FOAM			3,3											
3818	BE	OE	GE		EMPTY			3,14	12,4	18,4	380	270	180	45	135	410	340	205	
	B	O	G		W/FOAM		3,58												
4412	BE	OE	GE		EMPTY	YES		3,4	10,7	19,2	445	345	125	47	78	474	415	149	
	B	O	G		W/FOAM			3,9											
	BC		GC		PC BAG			4,2											
4419	BE	OE	GE		EMPTY	YES		4	19,7	29,2	445	345	190	47	143	474	415	214	
	B	O	G		W/FOAM			4,7											
4820	BE	OE	GE		EMPTY			4,64	24,7	35,5	480	370	205	50	155	520	435	230	
	B	O	G		W/FOAM		5,4												
5117	BE	OE	GE		EMPTY	YES		3,8	15,8	24,7	517	277	173	50	123	546	347	197	
	B	O	G		W/FOAM			4,5											
5122	BE	OE	GE		EMPTY	YES	YES	6	21,5	31	517	277	217	50	167	546	347	247	
	B	O	G		W/FOAM														7
5325	BE	OE	GE		EMPTY	YES		7	37,2	53	538	405	250	60	190	607	475	275	
	B	O	G		W/FOAM			8,25											
5326	BE	OE	GE		EMPTY	YES	YES	10	37,2	53	538	405	250	60	190	627	475	292	
	B	O	G		W/FOAM														11,25
5822	BE	OE	GE		EMPTY			7,16	36,7	56,1	580	440	220	60	160	650	510	245	
	B	O	G		W/FOAM		8,39												
5823	BE	OE	GE		EMPTY	YES		9,17	36,7	56,1	580	440	220	60	160	670	510	262	
	B	O	G		W/FOAM			10,4											
5833	BE	OE	GE		EMPTY	YES		10,54	62	84,2	580	440	330	60	270	670	510	372	
	B	O	G		W/FOAM			12,65											
7630	BE	OE	GE		EMPTY	YES		13,56	81,8	113,1	765	485	305	60	245	860	560	355	
	B	O	G		W/FOAM			16,39											
7641	BE	OE	GE		EMPTY	YES		15,02	118,5	153,9	765	485	415	60	355	860	560	460	
	B	O	G		W/FOAM			18,87											
9413	BE		GE	DE	EMPTY	YES		6,7	27,9	45,3	939	352	137	43	94	989	415	157	
	B		G	D	W/FOAM			7,7											
11413	BE		GE	DE	EMPTY	YES		7,8	33,3	53,7	1136	350	135	42	93	1189	415	159	
	B		G	D	W/FOAM			8,8											
13513	BE		GE	DE	EMPTY	YES		8,7	39,5	63,7	1350	350	135	42	93	1410	415	159	
	B		G	D	W/FOAM			9,95											
13527	BE		GE	DE	EMPTY	YES		11,7	97,5	128,5	1350	350	272	42	230	1430	415	296	
	B		G	D	W/FOAM			14,9											
10826	BE				EMPTY	YES		17	120,6	174	1080	620	260	60	200	1178	725	287	
	B				W/FOAM			20,4											
	B D2				WEAP. FOAM			19,6											
	B D4				WEAP. FOAM		YES	19,6											
10840	BE		GE		EMPTY	YES	YES	19,8	120,6	260	1080	620	400	200	200	1178	718	427	
	B		G		W/FOAM														26,3
	B D1		G D1		WEAP. FOAM														25
	B D2		G D2		WEAP. FOAM														25

\* Maximum weight capacity when contents are evenly distributed that maintains buoyancy level just below the lid closure line.

\*\* In models 5122, 5822, 5823 and 5833 the internal dimensions given are calculated on the deepest bottom area. However, the depth is shallower in places where allowance is made for the wheel wells and the telescopic handle well.

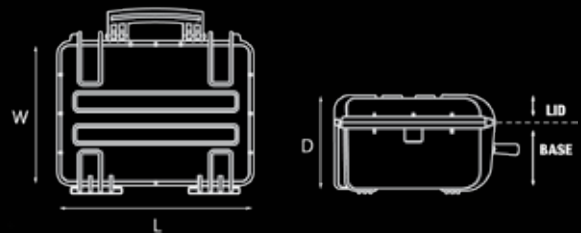

Distributed by:



GT LINE srl  
 Via del Lavoro, 50/52 - Loc. Crespellano  
 40053 Valsamoggia (Bo) - Italy  
 Tel. +39 051 65041 - Fax +39 051 734925  
 www.explorercases.com - salesinternational@gtline.com



REG. N. 1594-A  
 UNI EN ISO 9001:2008

Content is not included. The information contained in this catalogue are indicative only. GT Line reserves the right at all times to incorporate modifications in the models described, in accordance with technical or commercial requirements. Any trademarks or logos are property of the respective owners. Copyrights: ARCTIC 2004 PH LOUISE MURRAY; THE SHARK PROJECT 2005; GERMAN NAVY COMBAT DIVERS UNIFIL OPERATION LEGATION 2007; SVALBARD ISLANDS 2005 WHITE BEAR PH MIREILLE DE LA LEZ; DONNAVENTURA 2013; POLIZIA DI STATO NUCLEO ARTIFICIERI VENEZIA 2010; DAKAR RALLY - DAKAR PRESS TEAM 2014; CONSTANCE LAKE SWITZERLAND 2011; BLACKSHTEK 2006 PH ROBERTO PACHI; CERHO TORRE PATAGONIA 2011 PH M. CREVELLO.

REV. 2 CAT. GEN. EXPL. 10/14 4.000 EN