


DIS

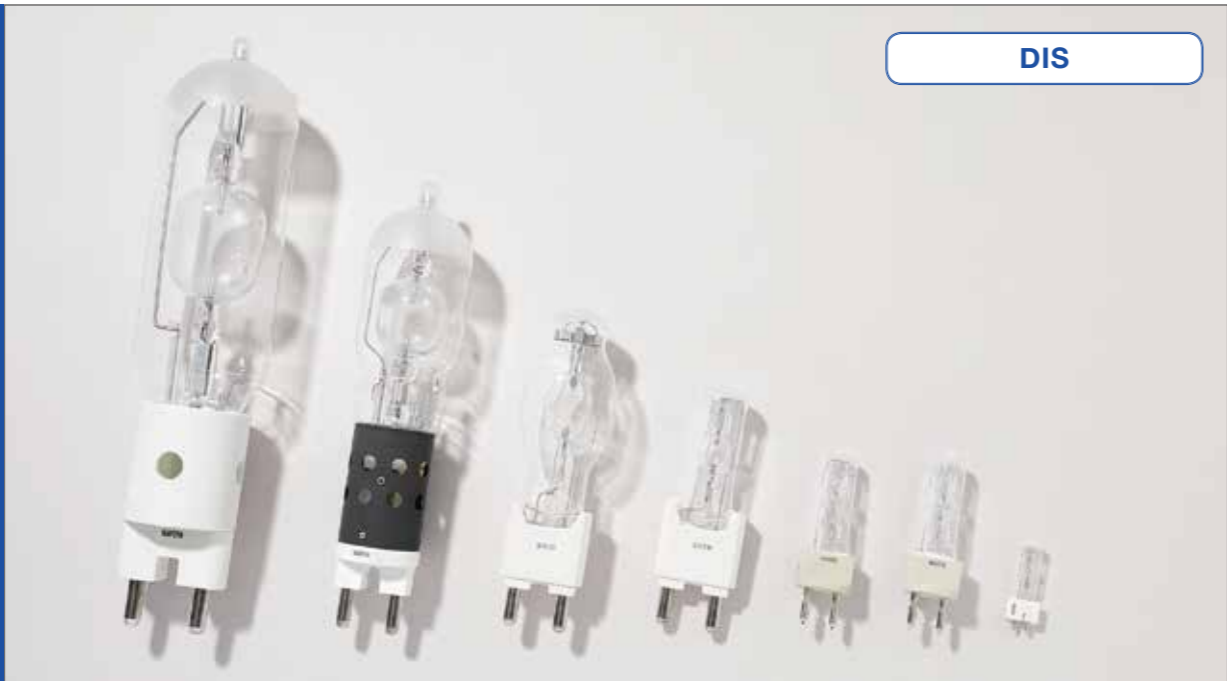


品名	ランプ電圧 [V]	ランプ電力 [W]	点灯方向	色温度 [K]	全光束 [Lm]	演色性 [Ra]	定格寿命 [hr]	外観寸法 (mm)			概略図	口金	補足
								A(管径)	B(全長)	C(光中心)			
DIS-1H	80	125	ANY	6,000	8,400	>80	200	17	75	39	Fig-1	GZX9.5	
DIS-2H	70	200	ANY	6,000	15,000	>90	200	20	80	39	Fig-1	GZY9.5	
DIS-4H	70	400	ANY	6,000	33,000	>90	750	23	110	60	Fig-1	GZZ9.5	
DIS-6H	95	575	ANY	6,000	49,000	>90	750	30	145	70	Fig-2	G22	
DIS-8H	95	800	ANY	6,000	70,000	>95	1000	31	145	70	Fig-2	G22	
DIS-12H	100	1,200	ANY	6,000	110,000	>90	750	42	200	107	Fig-3	G38	
DIS-18H	150	1,800	ANY	6,000	160,000	>90	750	42	200	107	Fig-3	G38	
DIS-25H	115	2,500	ANY	6,000	220,000	>90	500	60	240	127	Fig-4	G38	
DIS-40H	200	4,000	ANY	6,000	380,000	>90	500	75	255	142	Fig-4	G38	
DIS-60H	120	6,000	ANY	6,000	600,000	>90	300	85	360	210	Fig-5	G38	
DIS-90H	165	9,000	ANY	6,000	875,000	>90	400	85	360	210	Fig-5	G38	
DIS-120H	160	12,000	ANY	6,000	1,100,000	>90	250	103	450	255	Fig-5	G38	
DIS-180H VIVID	225	18,000	ANY	6,000	1,650,000	>90	350	103	470	260	Fig-6	G51	

品名	ランプ電圧 [V]	ランプ電力 [W]	点灯方向	色温度 [K]	全光束 [Lm]	演色性 [Ra]	定格寿命 [hr]	外観寸法 (mm)			概略図	口金	補足
								A(管径)	B(全長)	C(光中心)			
DIS-2H UV-Block	70	200	ANY	6,000	15,000	>90	200	20	80	39	Fig-1	GZY9.5	
DIS-4H UV-Block	70	400	ANY	6,000	33,000	>95	750	23	110	60	Fig-1	GZZ9.5	
DIS-6H UV-Block	95	575	ANY	6,000	49,000	>90	750	31	145	70	Fig-2	G22	
DIS-6H_C UV-Block	95	575	ANY	6,000	49,000	>90	750	31	145	70	Fig-2	G22	
DIS-6H SPOTLIGHT UV-Block	95	575	ANY	6,000	49,000	>90	1000	30	145	70	Fig-2	G22	
DIS-8H UV-Block	95	800	ANY	6,000	70,000	>95	1000	31	145	70	Fig-2	G22	
DIS-12H UV-Block	100	1,200	ANY	6,000	110,000	>90	750	42	200	107	Fig-3	G38	

品名	ランプ電圧 [V]	ランプ電力 [W]	点灯方向	色温度 [K]	全光束 [Lm]	演色性 [Ra]	定格寿命 [hr]	外観寸法 (mm)			概略図	口金	補足
								A(管径)	B(全長)	C(光中心)			
DIS-12HC UV-Block	100	1,200	ANY	6,000	110,000	>90	750	40	200	107	Fig-3	G38	
DIS-16H UV-Block	150	1,600	ANY	6,000	140,000	>90	750	40	175	85	Fig-2	G22	
DIS-25H UV-Block	115	2,500	ANY	6,000	220,000	>90	500	60	240	127	Fig-4	G38	
DIS-25HF UV-Block	115	2,500	ANY	6,000	220,000	>90	500	60	240	127	Fig-4	G38	受注生産 フロスト品
DIS-40H UV-Block	200	4,000	ANY	6,000	380,000	>90	500	75	255	142	Fig-4	G38	
DIS-40HF UV-Block	200	4,000	ANY	6,000	380,000	>90	500	75	255	142	Fig-4	G38	受注生産 フロスト品
DIS-60H UV-Block	120	6,000	ANY	6,000	540,000	>90	300	85	360	210	Fig-5	G38	
DIS-120H UV-Block	160	12,000	ANY	6,000	1,100,000	>90	250	103	450	255	Fig-5	G38	

品名	ランプ電圧 [V]	ランプ電力 [W]	点灯方向	色温度 [K]	全光束 [Lm]	演色性 [Ra]	定格寿命 [hr]	外観寸法 (mm)			概略図	口金	補足
								A(管径)	B(全長)	C(光中心)			
DIS-25H UV-Cut	115	2,500	ANY	5,600	220,000	>90	500	60	240	127	Fig-4	G38	
DIS-25HF UV-Cut	115	2,500	ANY	5,600	220,000	>90	500	60	240	127	Fig-4	G38	受注生産 フロスト品
DIS-40H UV-Cut	200	4,000	ANY	5,600	380,000	>90	500	75	255	142	Fig-4	G38	
DIS-40HF UV-Cut	200	4,000	ANY	5,600	380,000	>90	500	75	255	142	Fig-4	G38	受注生産 フロスト品

概略図

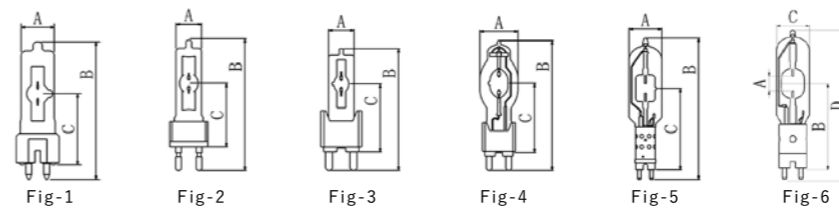

口金図

