



Q·8

DualSource Strobe / Flood / Pixel / Blinder



Description

The Q-8 combines the compact size and low power consumption of the Q-7, the advanced industrial design of the Q-10, and the powerful strobe-blinder of the G-7 BeaSt in 2 separated arrays. This high color quality DualSource luminaire features RGBW mixing, pixel-mapping control, 110° and 75° spread angles, and all the benefits of magnetic easy-fit filter frames. It is a waterproof key or fill light for on location filming, a strobe effect for touring, and a direct view fixture in a lightweight and robust design: the Q-8 the definitive mid-size flood/blinder.

Features and benefits

- ✓ IP66-rated 110° / 75° DualSource LED luminaire with >53,000 lumens
- ✓ High CRI and high TLCI (above 90) with RGBW mixing
- ✓ CTC linear control from 2,000K to 10,000K
- ✓ User friendly display, wireless control, and integrated handle
- ✓ RGBW mixing and 2 linear White LED blinders with 8 individually controllable segments
- ✓ High-quality dimming performance with color filter emulation / SGM Versapath ready
- ✓ Magnetic easy-fit holographic filter frames

Certifications & classifications









IP66
INGRESS


RoHS
COMPLIANT

CE



REVISIONS				
REV.	DESCRIPTION	ECO	DATE	CHANGED BY

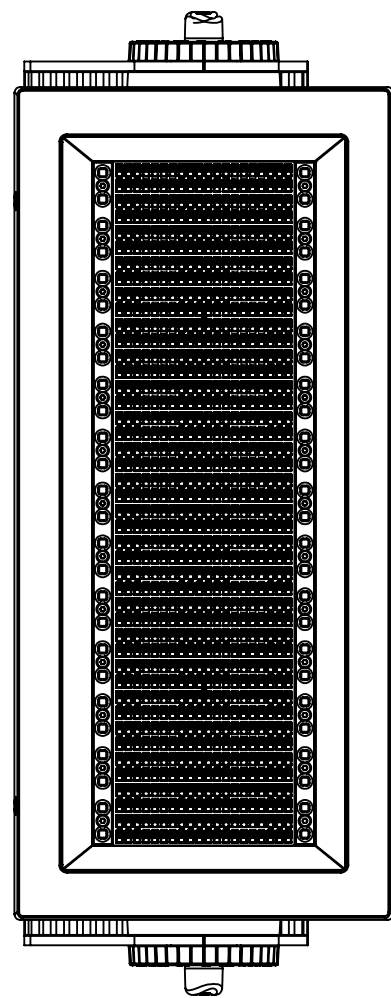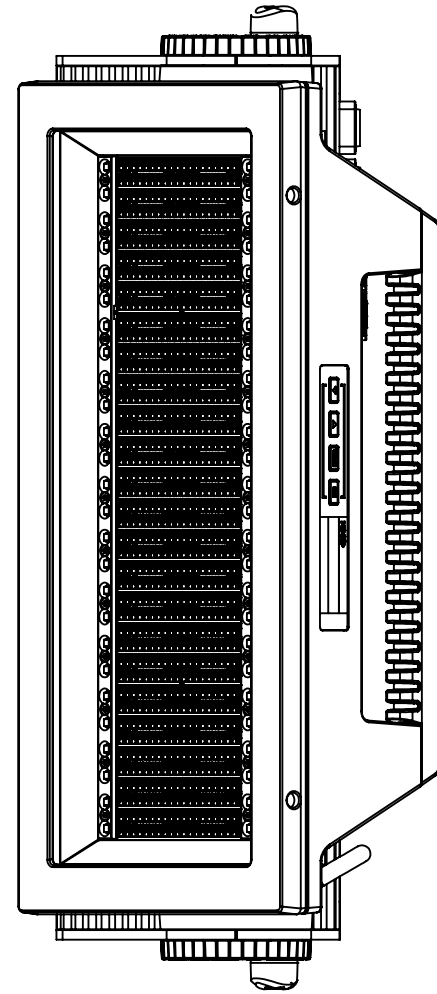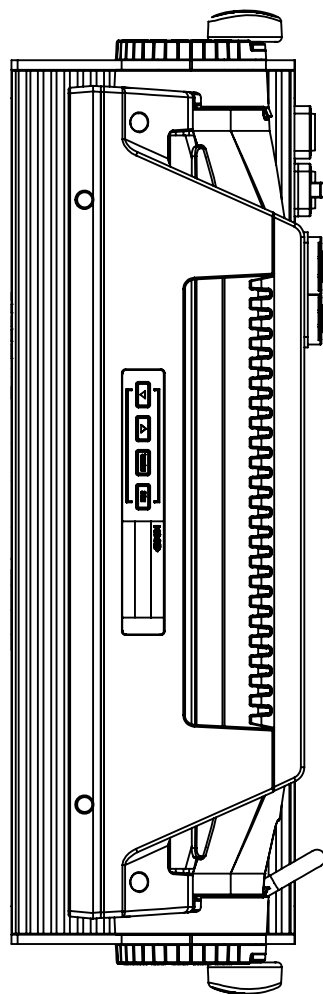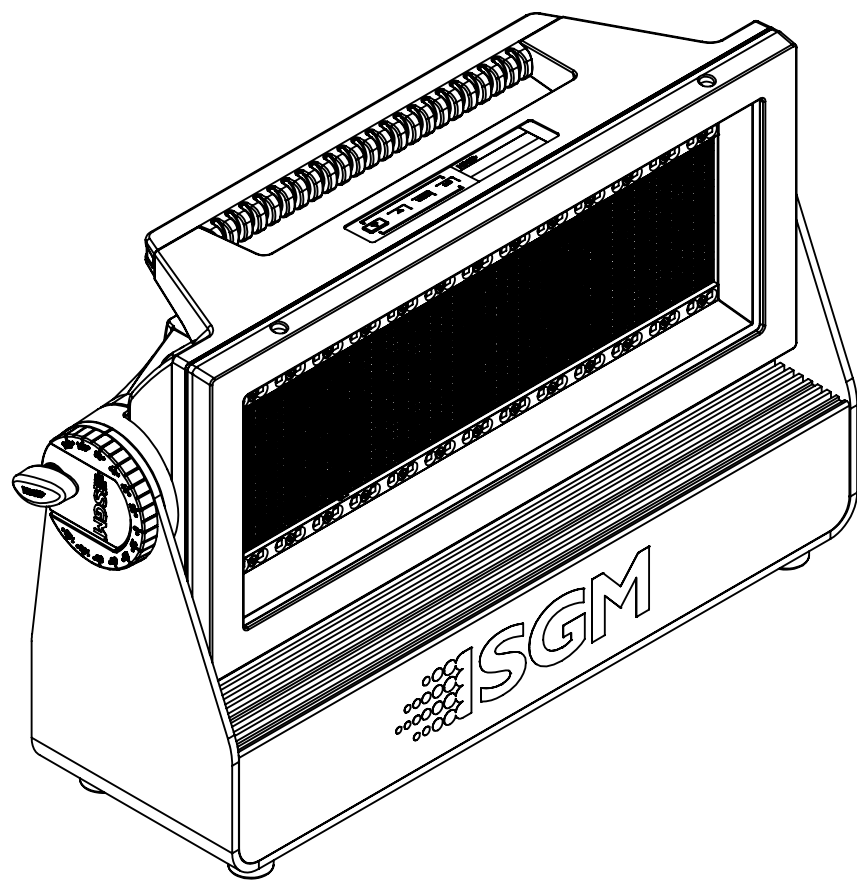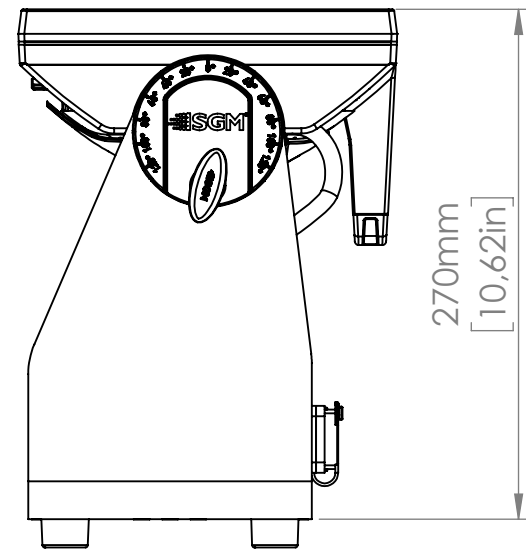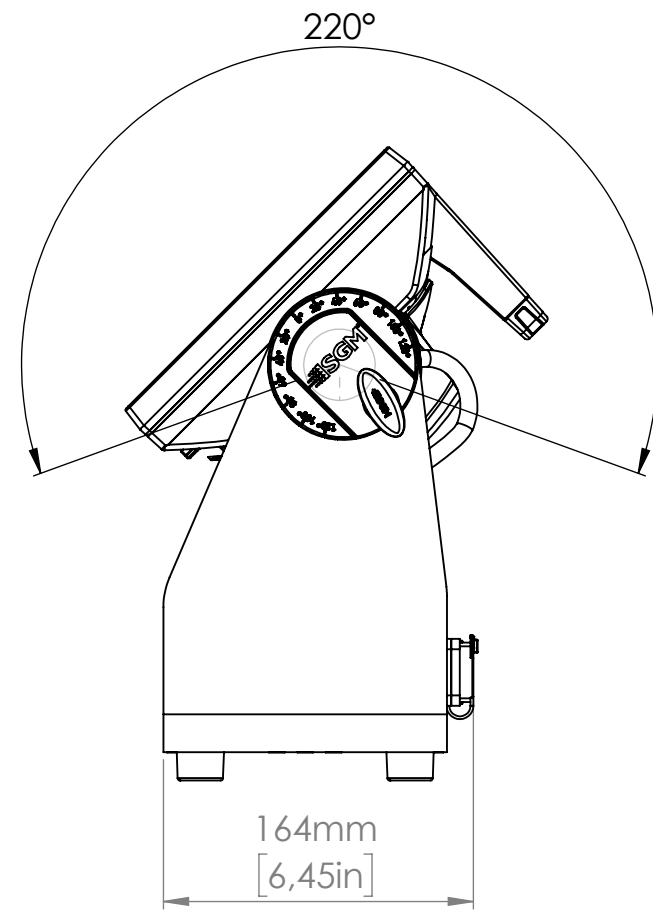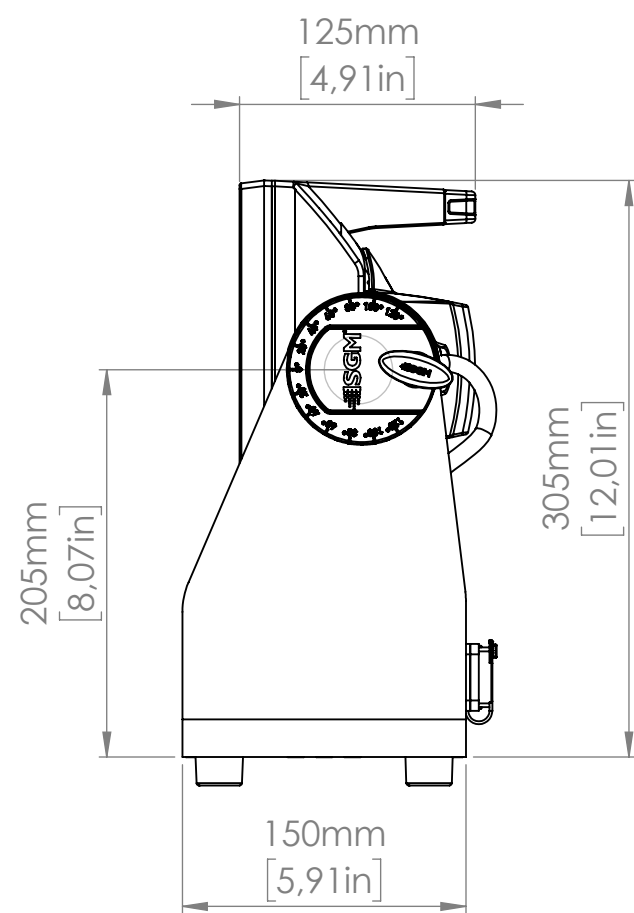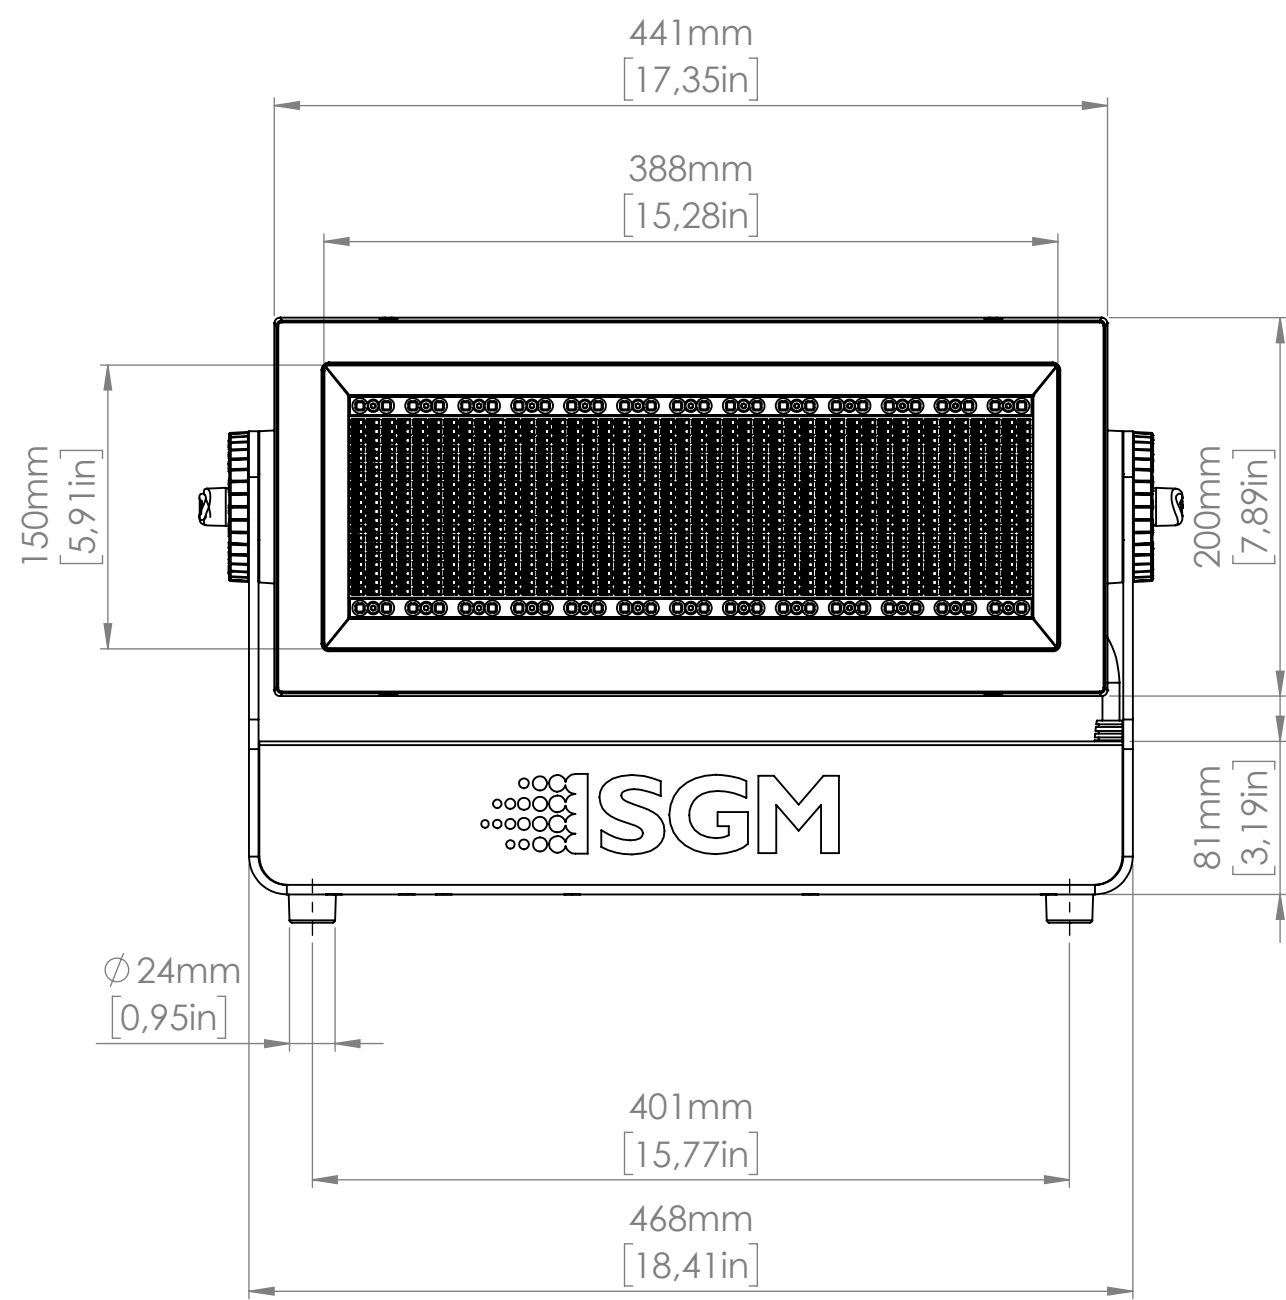

Tolerances according to ISO 2768-1: M		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		PAPER SIZE: A2	
Nominal size	Permissible deviations						
0,5 up to 3	±0,1	NAME	DATE	TITLE:			
over 3 up to 6	±0,1	Created By	6. marts 2018 13:27:36		Q-8 Flood Strobe, Std, BL		
over 6 up to 30	±0,2	Last saved By	bar 18. marts 2021 16:21:34				
over 30 up to 120	±0,3	FINISH:		DWG NO.			
over 120 up to 400	±0,5	MATERIAL:		80031750- A Service			
over 400 up to 1000	±0,8	Material <not specified>					
over 1000 up to 2000	±1,2	WEIGHT: 13369.95				SCALE:1:5	
						SHEET 1 OF 1	

Specification

Optical Data	LED expected lifetime (L70)	20,000 hours (Strobe blinders) 50,000 hours (RGBW panel)
	Lightsources	880 x RGB LEDs, 880 x W LEDs (5,700K), 52 x W LEDs (7,000K)
	Native lens options	110°
	Optional filters	Extra medium angle soft diffusion, Q, external Extra wide angle soft diffusion, Q, external Elliptical horizontal effect, Q, external Elliptical vertical effect, Q, external
Photometric	Average CQS (CTC)	92
	Average CRI (CTC)	90
	Average RF / TM-30-15 (CTC)	89
	Average TLCI (CTC)	90
	Color temperature	7000K (Strobe blinders) 5700K (RGBW panel, calibrated)
	Color temperature range	2000K - 10000K
	Efficacy	112 lm/W
	Light output - all LEDs on	53849 lm
	Light output - blue	1644 lm
	Light output - green	8660 lm
	Light output - red	4162 lm
	Lumen per kilogram	3989 lm / Kg
	Lux @ 10m	346 lux
	Lux @ 5m	1386 lux
	Max. CRI @ 5600K	96
	Max. TLCI @ 5600K	95
	Maximum beam angle	107 °
	Native beam angle(s)	107° (panel with 110° lens) 75° (Strobe blinders)
	Native field angle(s)	140° (panel with 110° lens) 119° (strobe blinders)
Physical	Color options	Black - RAL 9004 Custom color - Any RAL White - RAL 9010
	Effective Projected Area	2.15 Square ft
	IK rating	IK06
	IP class	IP66
	Lens material	Tempered glass front
	Material	Aluminium

		PC/ASA Rubber Steel
	Net dimensions L x H x W (imperial)	20.5 x 12.6 x 6.5 inches
	Net dimensions L x H x W (metric)	520 x 320 x 166 mm
	Net weight	13.5 kg (29.8 lbs)
Features	Addressable pixels	4 (Panel) + 4 (Strobe Blinders)
	Color calibration	SGM proprietary, full color calibration
	Dehumidifier	Head
	Dimming	12 DMX-controllable curves (smooth fade in / fast response / low-end extended range)
	Emulation mode / effect	Tungsten response emulation Color Filter Emulation
	Filters	Magnetic easy-fit spread angle filter frames
	LED panel	8 individually controllable segments
	Other	Studio DMX mode(s) Versapath color engine Independent control of Panel and Strobe Blinders LED frequency control over DMX + High Speed mode (up to 2000 fps)
	Strobe	Ultra-high-speed strobe effects Dualsource Strobe Blinder Dual color RGBW strobe Intensity, Duration, Rate and FX control channels per lightsource (3) Pixel strobe feature (up to 8 segments)
	Tilt	220°
	Tilt locking system	Locking system with angle indicator
	View angle	110°
Electrical	Electrical protection	Overload protection with automatic recover
	Input voltage (nominal)	115 - 277 VAC; 50 / 60 Hz
	Max inrush current 230VAC	70 A
	Max power consumption	630 W
	Max power thru @ 100 V	13 A
	Max power thru @ 230 V	13 A
	Power factor	0.96 PF (230 V)
	Power Supply Unit	Inbuilt IP 67 Auto-ranging electronic switch-mode
	Standby power consumption	8 W
Programming and Control	16-bit control	Dimmer, Red, Green, Blue, White, Pixels

	Cabled DMX	5 pin XLR input/output
	DMX channels	10, 12, 27, 34, 36, 41, 52
	DMX modes	8
	Protocol	CRMX, W-DMX™ G2, W-DMX™ G3, W-DMX™ G4, W-DMX™ G4S USITT DMX512A RDM ANSI E1.20
	Setting and addressing	OLED graphical display / 4 buttons RDM ANSI E1.20
	Standalone mode	Quick Color 3 programs with up to 24 scenes
	Wireless DMX	Lumen Radio with RDM
Connections	DMX data in/out	IP66 XLR 5-pin connector, Female IP66 XLR 5-pin connector, Male
	Power	Power input connector & link-thru
Installation	Mounting point	3 x two quarter-turn locking points for two or three Omega Brackets
	Orientation	Any
	Rigging possibilities	Hanging (Omega Bracket included) or ceiling/wall mount (optional)
	Safety features	Bottom mount for safety wire Minimum distance to combustible materials: 0.3 meter (11 in).
Thermal	Cooling	Active, Forced Air, Temperature-regulated
	Humidity (max.)	98 %
	Temperature range, operating	-40°C to 50°C
	Temperature range, start-up	-20°C to 50°C
	Temperature range, storage	-40°C to 80°C
	Thermal protection	Automatic overtemperature protection
	Total heat dissipation, max power	2149.6 BTU per hour
	Total heat dissipation, standby	27.3 BTU per hour
Included items	Included items	2 Omega bracket with quarter-turn fasteners 2 m IP66 power cable pigtail Safety instructions and installation quick guide
Conforms To	CE - 2014/30/EU: EMC Directive	EN 55015 EN 61547 EN 61000-3-2 EN 61000-3-3 EN 55032 EN 55035

CE - 2014/35/EU: Low Voltage
Directive

EN 60598-1
EN 60598-2-17
EN 62471
EN 60529

RoHS2 Directive
UL

2011/65/EU
UL Std. 1573

Certified To

CSA

CSA Std. C22.2 No. 166

Ordering information

Qty	Product name	Item number
☐	Q-8 Flood Strobe, Std, CU	80031752
☐	Q-8 Flood Strobe, Std, BL	80031750
☐		
Accessories		Item number
☐	Omega Bracket with 1/4-turn fasteners	83060602
☐	Power cable with IP connector	07860275
☐	SGM USB uploader cable	83062011
☐	SGM Vacuum Test Kit	83061136
☐	4-way Barndoors for P-6 / Q-8 / i-6	83061173
☐	Filter frame for P-6/Q-8 - medium angle	83061170
☐	Filter frame for P-6/Q-8 - wide angle	83061171
☐	Filter frame for P-6/Q-8 - elliptical horizontal wide angle	83061168
☐	Filter frame for P-6/Q-8 - elliptical vertical wide angle	83061169
☐	8-way Barndoors for P-6 / Q-8	83061186
☐	RDM Addressing Tool	
☐	Flight Case for 4 pcs of P-6/Q-8 incl. accessories	82051509
☐	Spigot adapter for omega bracket	83060639
☐	DoPchoice Snapbag for Q-8 / P-6	83061189
☐	DoPchoice Snapgrid for Q-8 / P-6	83061190
☐	Filter Frame Extender, P-6 / Q-8	83061191
☐		



Headquarter +45 70 20 74 00

Mail info@sgmlighting.com

Website sgmlight.com