



**KINO FLO**  
LIGHTING SYSTEMS

**2014**



# Mega 4Bank DMX



The 8ft and 6ft Mega 4Bank DMX lighting systems are the largest portable soft lights designed by Kino Flo. They give the cinematographer or lighting designer a unique soft light that cannot be easily duplicated with traditional luminaires. Lightweight and cool in operation, they can be hand-held, attached directly to a set wall, or stand mounted.

### The 4-Lamp Mega Fixture

- Built-in Barndoors
- Removable Reflector, Louver and Lamp Harness
- Twist-on locking Center Mount
- True Match® daylight, tungsten

### The High Output Ballast

- Mega 4Bank DMX
- Flicker-free, HO/Std switching
- Individual lamp control
- Instant-on, dead quiet
- Remote operation

### ▼ Mega 4Bank DMX Systems



**CFX-9604**  
8ft Fixture



**CFX-7204**  
6ft Fixture



**X19-25M**  
Extension, 25ft



**BAL-455-M120**  
Mega DMX Ballast, 120VAC

**BAL-455-M230**  
Mega DMX Ballast, 230VAC

**MTP-K81**  
Kino 81 Mount  
w/ Junior Pin (28mm)

### ▼ Photometrics

8ft 4Bank	FC	579	247	136	84	57	41	31	24	20	16.5
Feet	2	4	6	8	10	12	14	16	18	20	

6ft 4Bank	FC	543	208	105	63	42	30	22.5	17	14	11.5
Feet	2	4	6	8	10	12	14	16	18	20	

8ft 4Bank	LUX	7708	3552	1981	1260	861	624	477	377	306	250
Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	

6ft 4Bank	LUX	7224	3007	1583	958	646	461	347	272	220	178
Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	

### ▼ Fixture Specifications

Fixture	Lamps	Lamp Type	Dimensions	Weight w/ Lamps
8ft Mega 4Bank	4	F120/T12	97 x 13 x 3.5" w/ 3.5" barndoors (246.5 x 33 x 9cm w/ 9cm barndoors)	21.8 lb (9.8kg)
6ft Mega 4Bank	4	F100/T12	73.5 x 13 x 3.5" w/ 3.5" barndoors (186.5 x 33 x 9cm w/ 9cm barndoors)	18.5 lb (8.3kg)

### ▼ Ballast Specifications

Ballast	Input Voltage	Output Frequency	Amperage	Lamp Switching	Output Switching	Dimensions	Weight
Mega 4Bank DMX	120VAC 50/60Hz	25kHz	F120/7.0A F100/6.4A	1-4	HO/Std	13 x 12.5 x 2.5" (33 x 32 x 6.5cm)	6.5 lb (2.9kg)
Mega 4Bank DMX	230VAC 50/60Hz	25kHz	F120/3.5A F100/3.2A	1-4	HO/Std	13 x 12.5 x 2.5" (33 x 32 x 6.5cm)	6.8 lb (3.1kg)

### ▼ Details



### ▼ Mega 4Bank Accessories



**MTP-BAL**  
Kino Ballast Baby Mount  
(16mm)



**X19-A7M**  
Mega 4Bank to Mega Single  
Splitter



**X19-A9M**  
Mega 4Bank to Mega Double  
Splitter



**KAS-96L**  
8ft Fixture Ship Case



**KAS-96**  
8ft Lamp Ship Case



**KAS-72**  
6ft Lamp Ship Case



**KAS-KFC**  
Ballast and Cable Crate  
with Lid

# Mega Double



## ▼ Photometrics

8ft Double	FC	314	132	73	45	30	22	16.5	13	10.5	8.5
	Feet	2	4	6	8	10	12	14	16	18	20
6ft Double	FC	292	111	55	33	22	16	12	9	7	6
	Feet	2	4	6	8	10	12	14	16	18	20

8ft Double	LUX	4166	1906	1055	678	458	331	254	200	163	131
	Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
6ft Double	LUX	3983	1597	829	506	337	241	182	142	114	92
	Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5


## ▼ Fixture Specifications

Fixture	Lamps	Lamp Type	Dimensions	Weight w/ Lamps
8ft Mega Double	2	F120/T12	97 x 7.5 x 3.5" w/ 3.5" barndoors (246.5 x 19 x 9cm w/ 9cm barndoors)	10 lb (4.5kg)
6ft Mega Double	2	F100/T12	73.5 x 7.5 x 3.5" w/ 3.5" barndoors (186.5 x 19 x 9cm w/ 9cm barndoors)	9.2 lb (4.1kg)

## ▼ Ballast Specifications

Ballast	Input Voltage	Output Frequency	Amperage	Lamp Switching	Output Switching	Dimensions	Weight
Mega Double	120VAC 50/60Hz	25kHz	F120/3.7A F100/3.1A	1-2	HO/Std	9.5 x 9 x 3" (24 x 23 x 7.6cm)	3.5 lb (1.6kg)
Mega Double	230VAC 50/60Hz	25kHz	F120/2.2A F100/1.7A	1-2	HO/Std	9.5 x 9 x 3" (24 x 23 x 7.6cm)	4.2 lb (1.9kg)

## ▼ Details

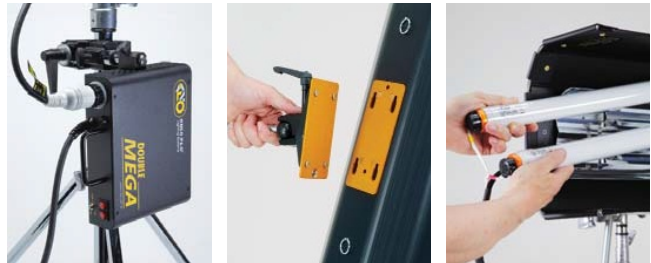

The 8ft and 6ft Mega Double portable lighting systems are ideal for practical lighting in large areas such as warehouses or super markets where they can reproduce natural ambient light. Mega Double features:

### The 2-Lamp Mega Fixture

- Built-in Barndoors
- Removable Reflector, Louver and Lamp Harness
- Slide-on Center Mount
- True Match® daylight, tungsten

### The High Output Ballast

- Flicker-free, remote lamp control
- HO/Standard switching
- Instant-on, dead quiet
- Remote operation

## ▼ Mega Double Systems



**CFX-9602**  
8ft Fixture



**CFX-7202**  
6ft Fixture



**MTP-KM**  
Kino 81 Slide-on Mount  
w/ Junior Pin (28mm)



**X09-25M**  
Extension, 25ft



**BAL-215-M120**  
Mega Ballast, 120VAC

**BAL-215-M230**  
Mega Ballast, 230VAC

## ▼ Mega Double Accessories



**MTP-BAL**  
Kino Ballast Baby Mount  
(16mm)



**X09-A7M**  
Mega Double to Mega Single  
Splitter



**X09-A19M**  
Mega Double to Mega 4Bank  
Combiner

# Mega Single



## ▼ Photometrics

	FC	185	77	41	25	17	12	9	7	6	5
<b>8ft Single</b>	Feet	2	4	6	8	10	12	14	16	18	20
<b>6ft Single</b>	FC	160	60	30	18	12	8	6	5	4	3
	Feet	2	4	6	8	10	12	14	16	18	20

	LUX	2465	1089	603	379	259	188	143	113	91	74
<b>8ft Single</b>	Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
<b>6ft Single</b>	LUX	2164	867	452	272	182	130	98	76	61	49
	Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5


## ▼ Fixture Specifications

Fixture	Lamp	Lamp Type	Dimensions	Weight w/ Lamp
<b>8ft Mega Single</b>	1	F120/T12	97 x 4.5 x 3.5" w/ 3.5" barndoors (246.5 x 11.5 x 9cm w/ 9cm barndoors)	6.8 lb (3.1 kg)
<b>6ft Mega Single</b>	1	F100/T12	73.5 x 4.5 x 3.5" w/ 3.5" barndoors (186.5 x 11.5 x 9cm w/ 9cm barndoors)	6.3 lb (2.8 kg)

## ▼ Ballast Specifications

Ballast	Input Voltage	Output Frequency	Amperage	Lamp Switching	Output Switching	Dimensions	Weight
<b>Mega Single</b>	120VAC 50/60Hz	25kHz	F120/2.2A F100/1.6A	1-Off	HO/Std	11 x 2.5 x 2.5" (28 x 6.5 x 6.5cm)	2.1 lb (0.9kg)
<b>Mega Single</b>	230VAC 50/60Hz	25kHz	F120/1.1A F100/0.9A	1-Off	HO/Std	10.5 x 4 x 3" (26.5 x 10 x 7.6cm)	2.7 lb (1.2kg)

## ▼ Details

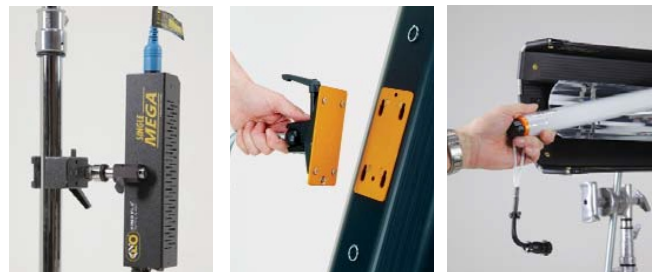

The 8ft and 6ft Mega Single portable lighting systems can be seen most often as built-in set design lights for feature film, commercial production and music videos. The Mega Single systems feature:

### The 1-Lamp Mega Fixture

- Built-in Barndoors
- Removable Reflector, Louver and Lamp Harness
- Slide-on Center Mount
- True Match® daylight, tungsten

### The High Output Ballast

- Flicker-free, remote lamp control
- HO/Standard switching
- Instant-on, dead quiet
- Remote operation

## ▼ Mega Single Systems



**CFX-9601**  
8ft Fixture



**CFX-7201**  
6ft Fixture



**MTP-KM**  
Kino 81 Slide-on Mount  
w/ Junior Pin (28mm)



**X07-25M**  
Extension, 25ft



**BAL-105-M120**  
Mega Ballast, 120VAC

**BAL-115-M230**  
Mega Ballast, 230VAC

## ▼ Mega Single Accessories



**MTP-BAL**  
Kino Ballast Baby Mount (16mm)



**X07-A9M**  
Mega Single to Mega Double  
Combiner



**X07-A19M**  
Mega Single to Mega 4Bank  
Combiner