




KINO FLO
Lighting Systems

celeb[®]
850

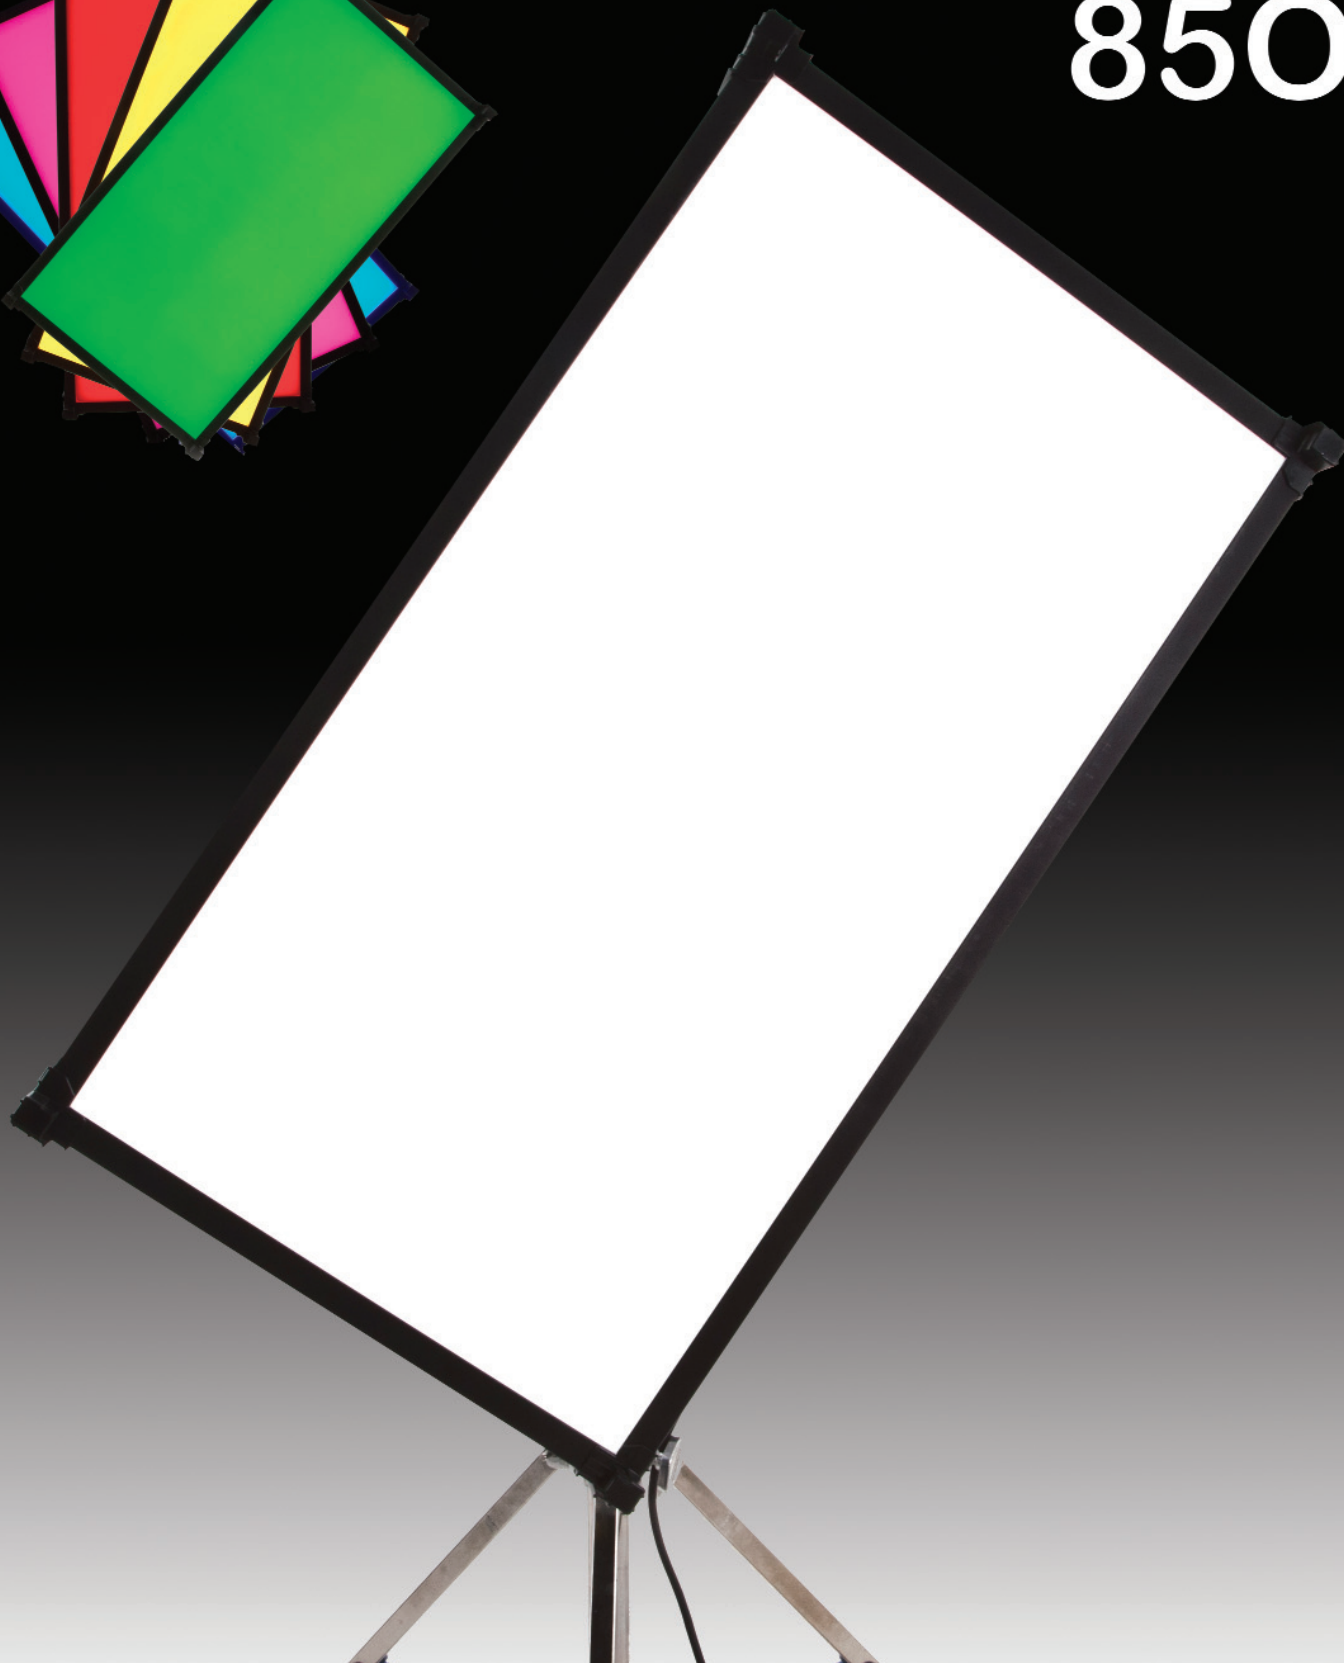

Celeb® 850 LED DMX



Center Mount Back



Yoke Back



Yoke Front

The Celeb® 850 joins Kino Flo's family line of LED soft lights. With new technical innovations the Celeb 850 features five menu options. In the white menu, Kelvin range is from 2700K to 6500K with **Dimming**, **Kelvin** and **Green/Magenta** control channels. In the first color menu, Kelvin is from 2500K to 9900K with three additional channels, **Gel**, **Hue Angle** and **Saturation**. The Gel channel includes Kino Flo presets and over 100 well-known lighting gels. The second color menu provides individual **RGB** (red, green, blue) control. The **CIE xy** menu allows you to enter xy coordinates. The **FX** (Effects) menu has custom presets like Candle, Fire, TV, Police, Lightning, Paparazzi, Pulse and Scroll. The Celeb 850 also comes with standard DMX and wireless DMX (Lumen Radio®), and universal input 100-240VAC. SnapBag and SnapGrid accessories are also available. Features include:

- Kelvin presets & custom settings, 2500K-9900K
- Manual & DMX Dimming, DMX wireless (Lumen Radio)
- Green/Magenta control
- Dial in any color through Hue Angle and Saturation control
- Kino Flo presets and Gels
- RGB control
- CIE xy
- FX (Effects) control
- Camera Profiles (LUTs)
- Color Space
- Center Mount, Yoke Mount & Pole-Op

▼ Celeb 850 LED DMX Center



CEL-850CU
Celeb 850 DMX
Center Mount, Univ



LVR-CE890
Celeb 850 Louver, 90°
(Included)



MTP-V63C
Celeb 850 Center
Mount Assembly
(Included)



MTP-V63JR
Celeb 850 Center
Junior Adapter (28mm)
(Included)


▼ Celeb 850 LED DMX Yoke



CEL-850YU
Celeb 850 DMX
Yoke Mount, Univ



CEL-850PU
Celeb 850 DMX Pole-Op,
Univ



LVR-CE890
Celeb 850 Louver, 90°
(Included)

▼ Photometrics

Celeb 850

FC	1728	604	297	171	111	78	59	47	37	31
Feet	2	4	6	8	10	12	14	16	18	20
LUX	23040	9270	4527	2664	1755	1251	927	728	590	484
Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5

▼ Fixture Specifications

Fixture	Input Voltage VAC	Amps VAC	Kelvin Range	Dimming Range	Dimensions	Weight
Celeb 850 DMX Center	100~240VAC, 50/60Hz, 575W	5.0A 2.5A	2500~9900	100%~1%	45 x 6 x 25.5" (114 x 15 x 65cm)	40 lb (18kg)
Celeb 850 DMX Yoke	100~240VAC, 50/60Hz, 575W	5.0A 2.5A	2500~9900	100%~1%	50 x 5 x 28" (127 x 13 x 71cm)	38 lb (17kg)

▼ Details



▼ Celeb 850 LED DMX Kits



KIT-C850U

Celeb 850 LED DMX Center Mount Kit, Univ

Contents	Dimensions	Weight
1 Celeb 850 LED DMX Center	52 x 10 x 30.5"	74 lb
1 Ship Case	(132 x 25 x 77cm)	(34kg)



KIT-C850YU

Celeb 850 LED DMX Yoke Mount Kit, Univ

Contents	Dimensions	Weight
1 Celeb 850 LED DMX Yoke	53.5 x 10 x 36"	78 lb
1 Jr. Pin	(136 x 25 x 91cm)	(35kg)
1 Ship Case		

▼ Celeb 850 LED DMX Accessories/ Cases



BRD-CE8
Celeb 850 Barndoors
(Set of 4)



LVR-CE860
Celeb 850 Louver, 60°



7010050
Celeb 850 Yoke Assembly



DFS-CE800-S
Celeb 850 SnapBag
w/ 2 x Diffusion



MTP-180
Junior Pin Assembly
for Yoke (28mm)



7010051
Celeb 850
Pole-Op Assembly



LVR-CE840-S
Celeb 850 SnapGrid, 40°



MTP-V63H1
Celeb 850 Center
Hanging Adapter (28mm)



KAS-CE850
Celeb 850 Center Ship Case

KAS-CE850-Y
Celeb 850 Yoke Ship Case



Kino Flo Lighting Systems
2840 North Hollywood Way
Burbank, CA 91505
+1 818 767 6528 voice

www.kinoflo.com
© Kino Flo Celeb 850 LED DMX
No. 3110100 Rev E